

COLLECTION
2026 / 27



800x1600mm
Digimatt 5.0

COSMO
SERIES



Setting Standards Since more than two decade of experience

We have been in the industry since 1999 and raising the standards in ceramic sector with our high standards and our certificates are the proof of that.



MOTTO®
Tiles & Bathware

About Company

Motto is one of the most dynamic & productive brands of the modern ceramic world that is brought to life by a visionary person Mr. Mahendra Patel. Over the years the company has developed manyfold.

Since 2004 - the inception year, to today we have expanded our reach to national & international arenas with a capillary presence in more than 70+ countries with 2500 satisfied customers.

Finest skills clubbed with state of the art technology have helped us to carve a niche, which is stamped by authorities as we are ISO 9001 : 2018 Certified. Overall the company has marked its position as the leading Manufacturer, Exporter and Supplier of the exquisite Ceramic Porcelain Tiles for Wall & Floor.

Cosmo Series Introduction

**A celestial beauty that offers a smooth
and surreal look!**

With the Cosmo Series, bring a high-definition
class to your space through its Digimatt 5.0 surface
that showcase a distinctive
level of detail!

Crafted with a digital printing technique,
these surfaces offer a premium look while
balancing strength and durability.
Their large-format looks also offer a seamless appeal
offers a seamless appeal in your space,
bringing a natural depth and beauty.



01. 800x1600mm

Intricate
Impressive
Impactful



Surface Introduction

Crafted in Style, Enhanced through Tech

An amalgamation of depth and details through the textured and raw effects, the Cosmo Series enhances your interiors with its realistic look. The Digimatt 5.0 adds an engraved effect to the digitally coated matt look. Let the authentic approach sprawl its impact of awe on your space!



A real and
raw magic!



Absolutely perfect for every space

Transform your interiors through a series that's resistant to the daily wear & tear, promising a long-lasting look!

Through these surfaces you get to experience a sturdy and durable approach that can withstand the stress and strain without compromising on its authenticity.

Applicable to a variety of settings, including residential and commercial areas, the Cosmo Series features durability, making it perfect for feature installations as well!

Unique Features:



Frost
Resistance



Thermal
Impact



High Load
Resistance



Fire
Proof



Easy to
Install



Ecological
Finish



Chemical
Resistant

Product Applications



Residential
Areas



Public
Spaces



Malls



Airports



Restaurants



Hotels



Office




Train
Station



Table of Contents




Cosmo Ivory
800x1600mm
Digimatt 5.0

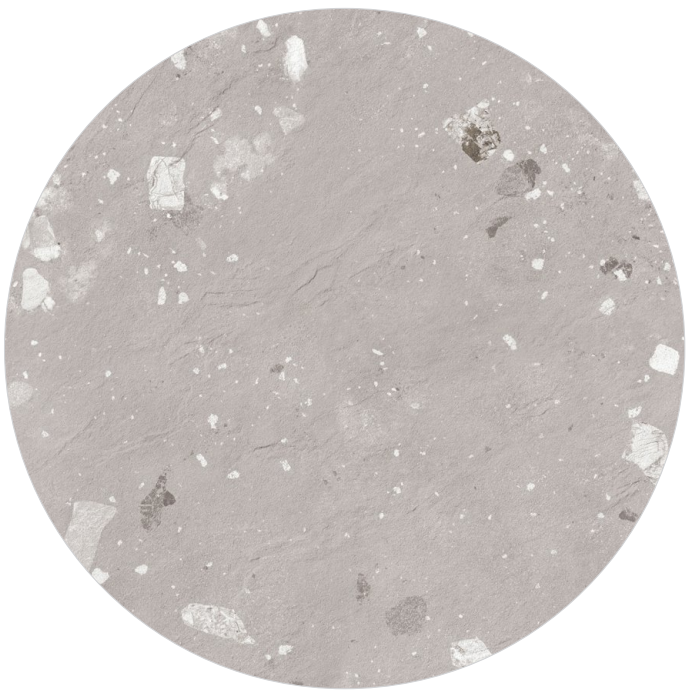

Cosmo Grigio
800x1600mm
Digimatt 5.0



Cosmo Silver
800x1600mm
Digimatt 5.0

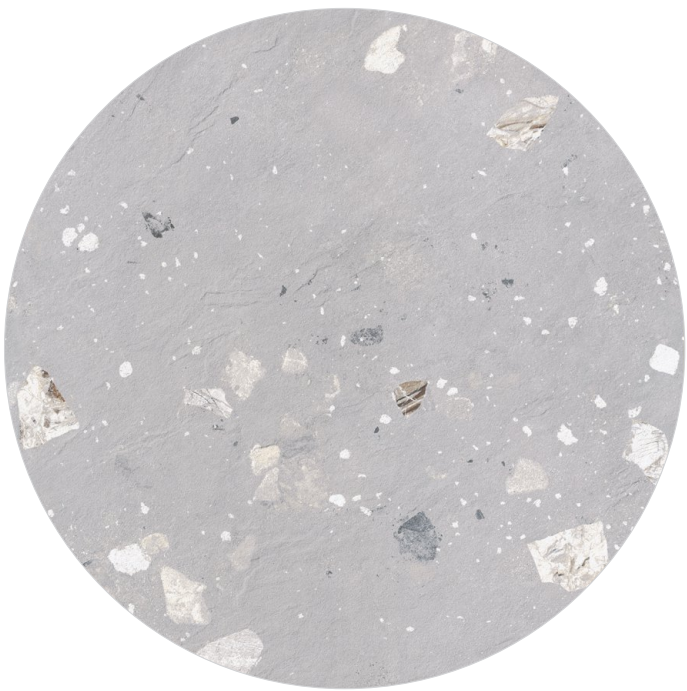

Cosmo Grey
800x1600mm
Digimatt 5.0




Size: 800x1600mm
Surface: Digimatt 5.0

MOTTO®
Tiles & Bathware

Cosmo Ivory

R-5

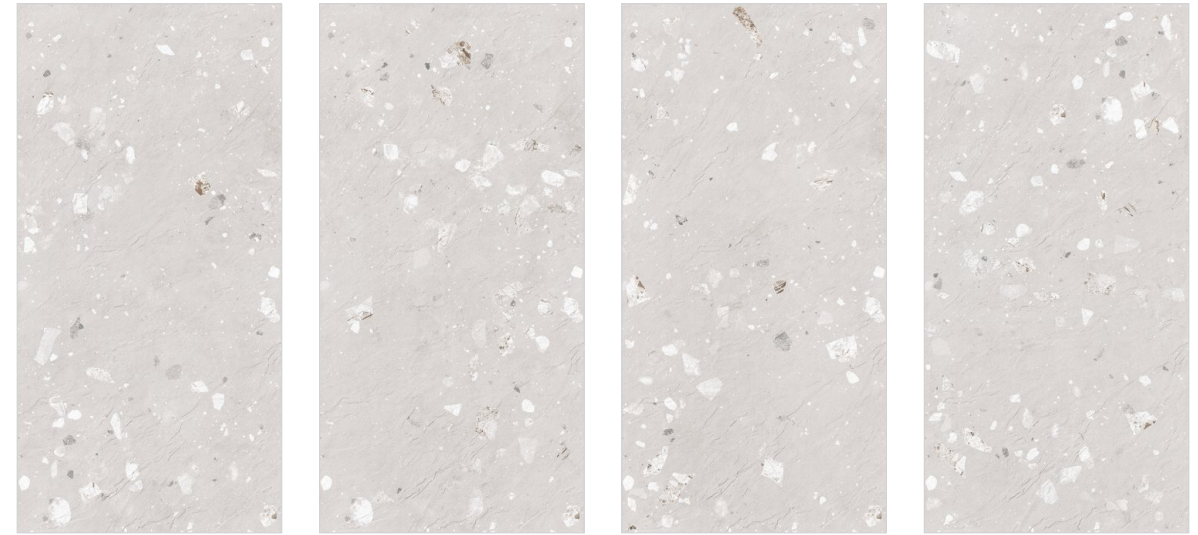

[Back to Index](#)



Cosmo Ivory
Digimatt 5.0
800x1600mm

SCAN FOR
VIRTUAL
360°







Size: 800x1600mm
Surface: Digimatt 5.0

Cosmo Grigio


R-5

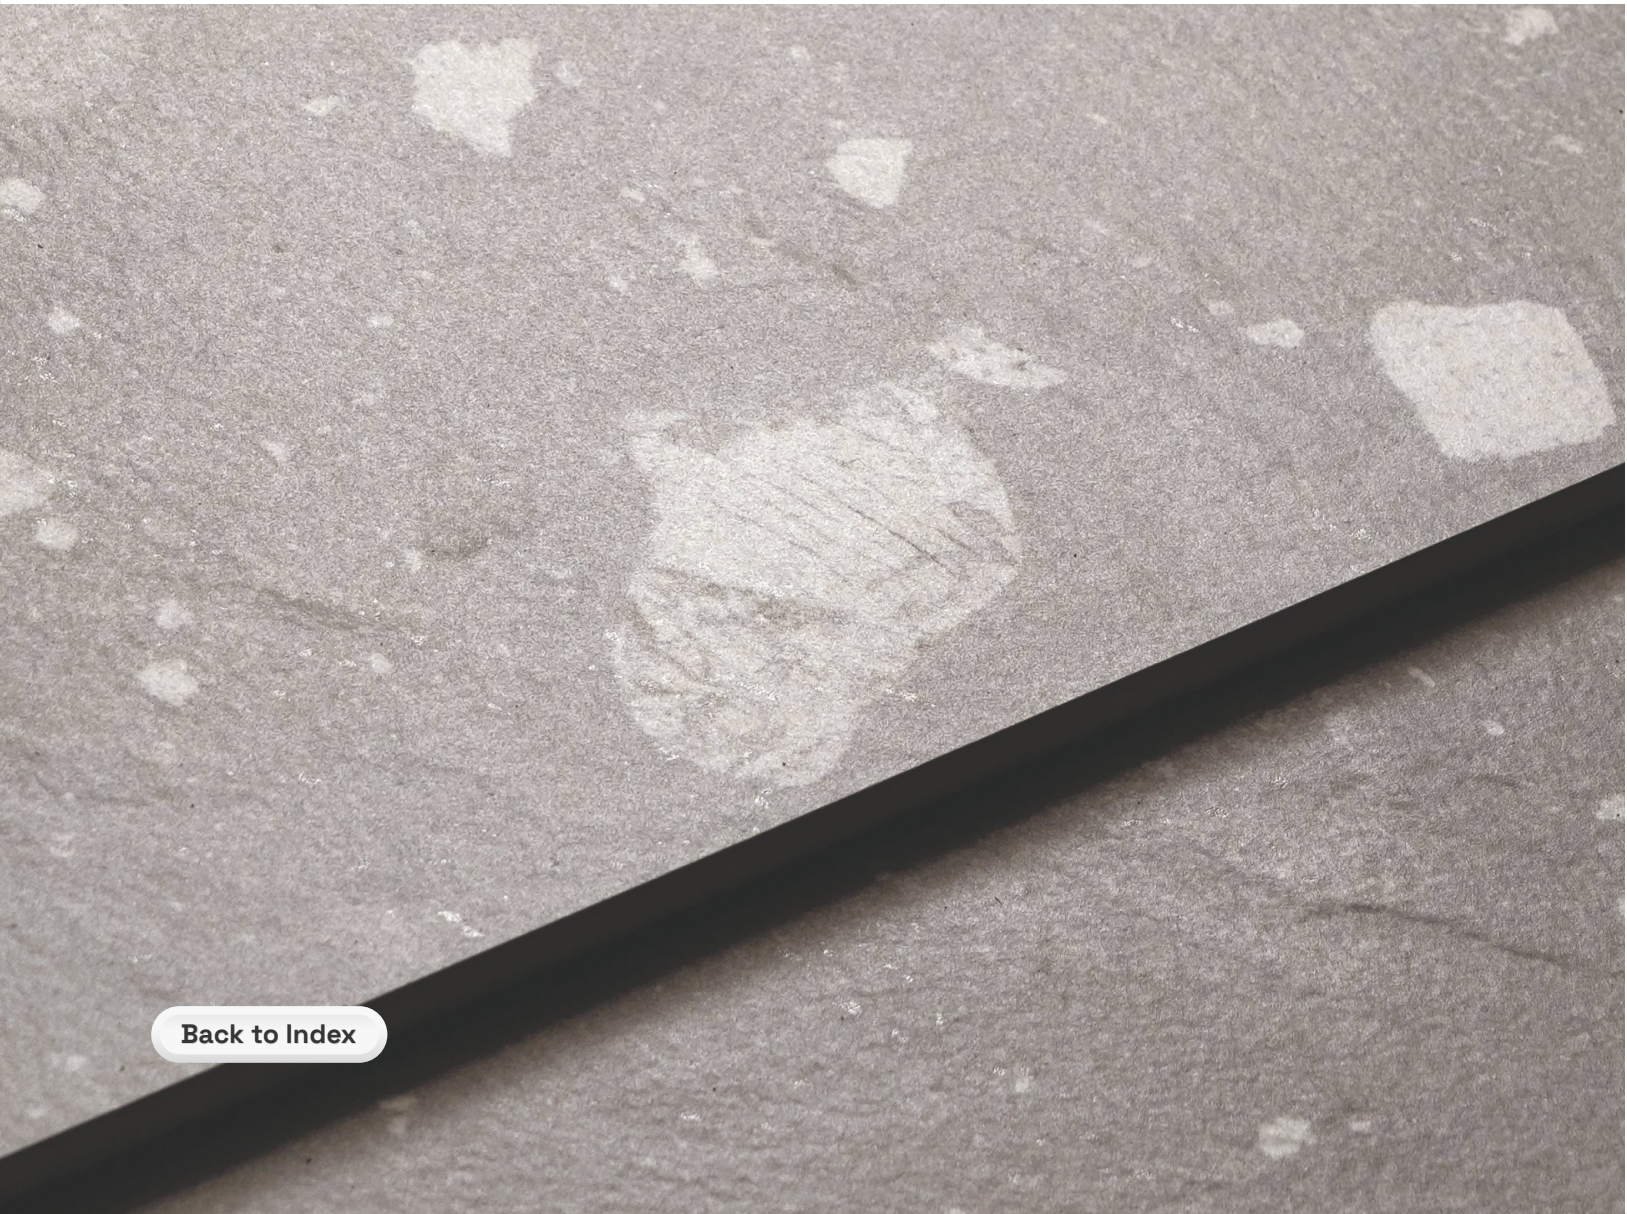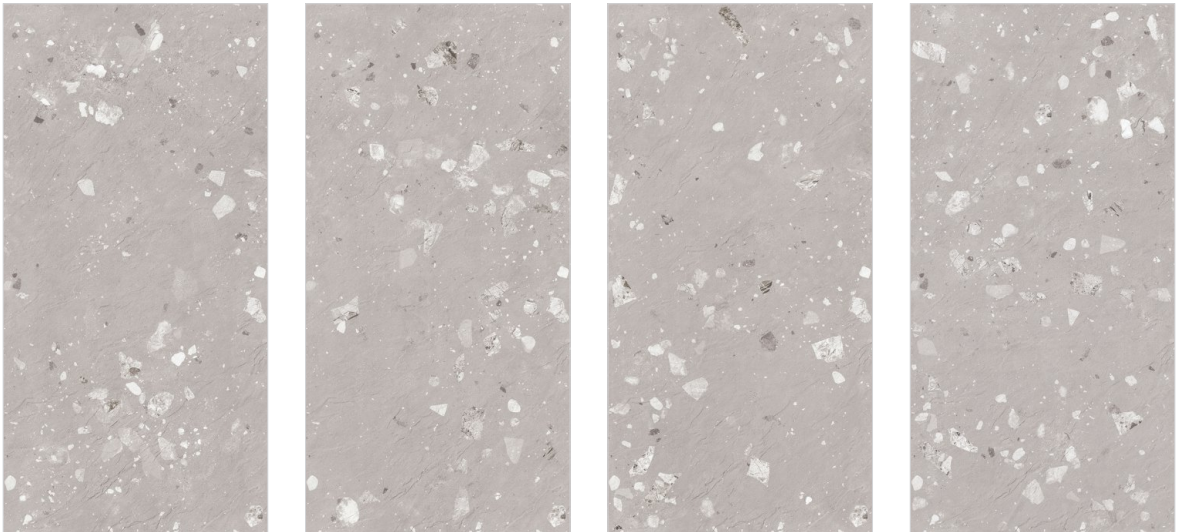

[Back to Index](#)

www.mottogroup.in

Cosmo Series /
Collection 2026 / 27

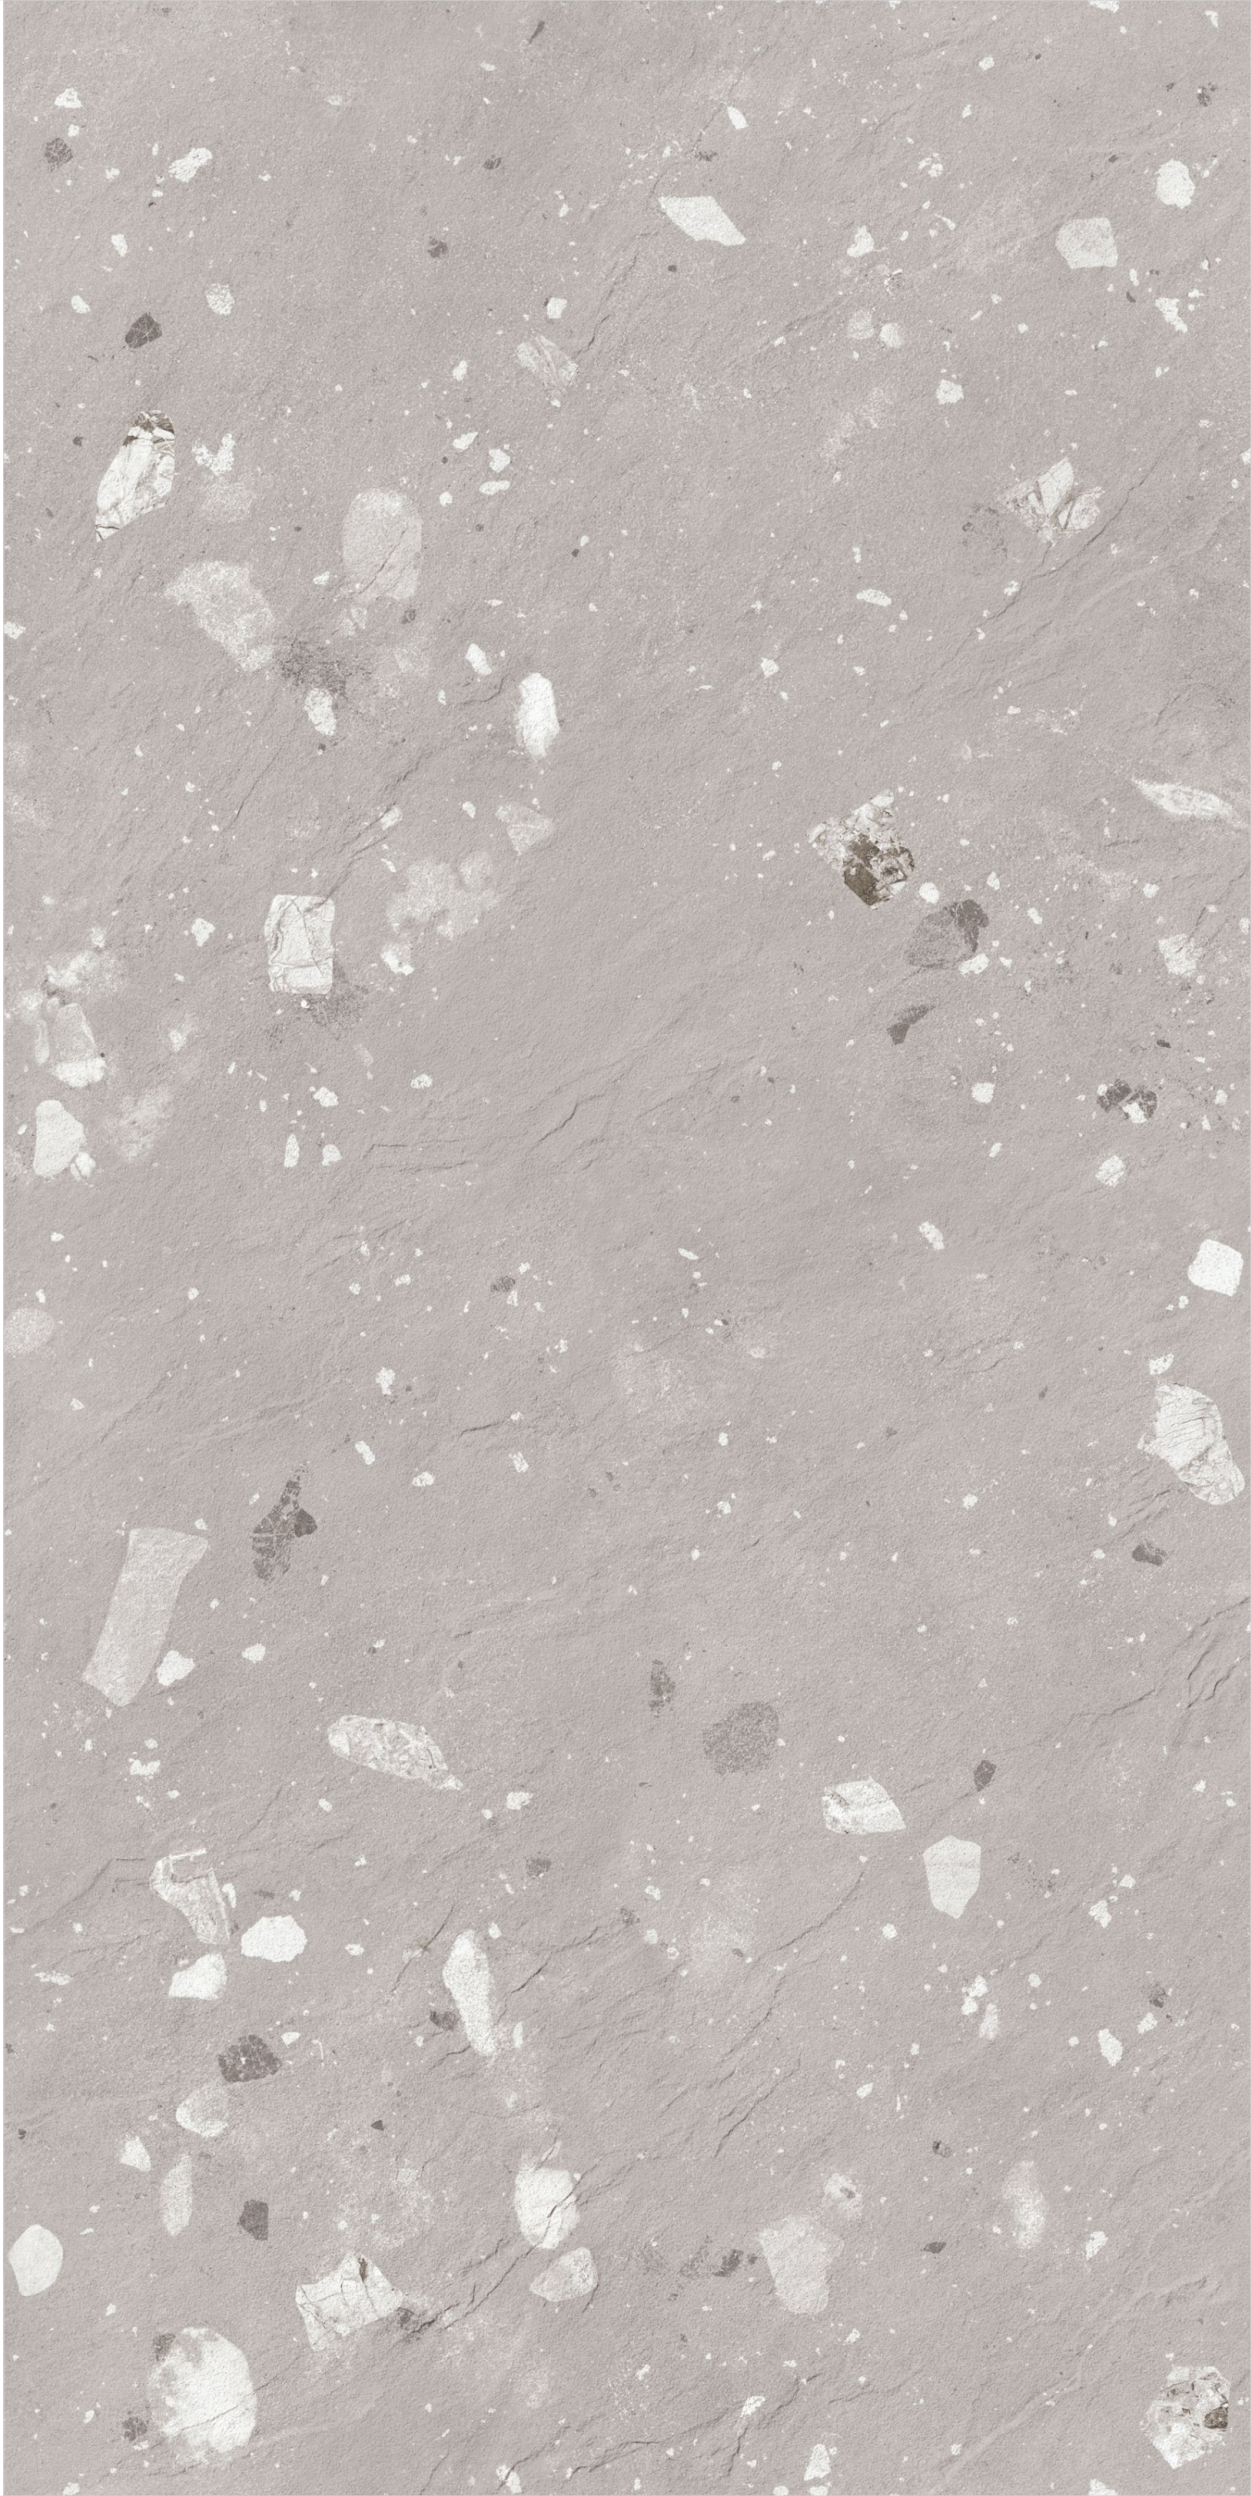



SCAN FOR
VIRTUAL
360°

Cosmo Grigio
Digimatt 5.0
800x1600mm




Size: 800x1600mm
Surface: Digimatt 5.0

MOTTO®
Tiles & Bathware

Cosmo Silver

R-5

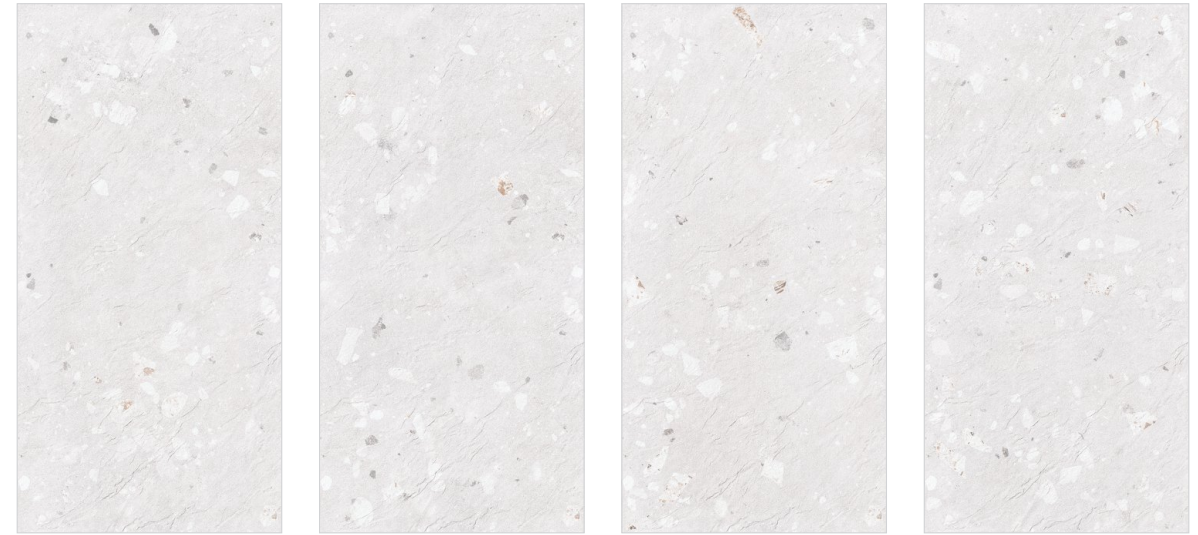

[Back to Index](#)



Cosmo Silver
Digimatt 5.0
800x1600mm

SCAN FOR
VIRTUAL
360°







Size: 800x1600mm
Surface: Digimatt 5.0

Cosmo Grey


R-5

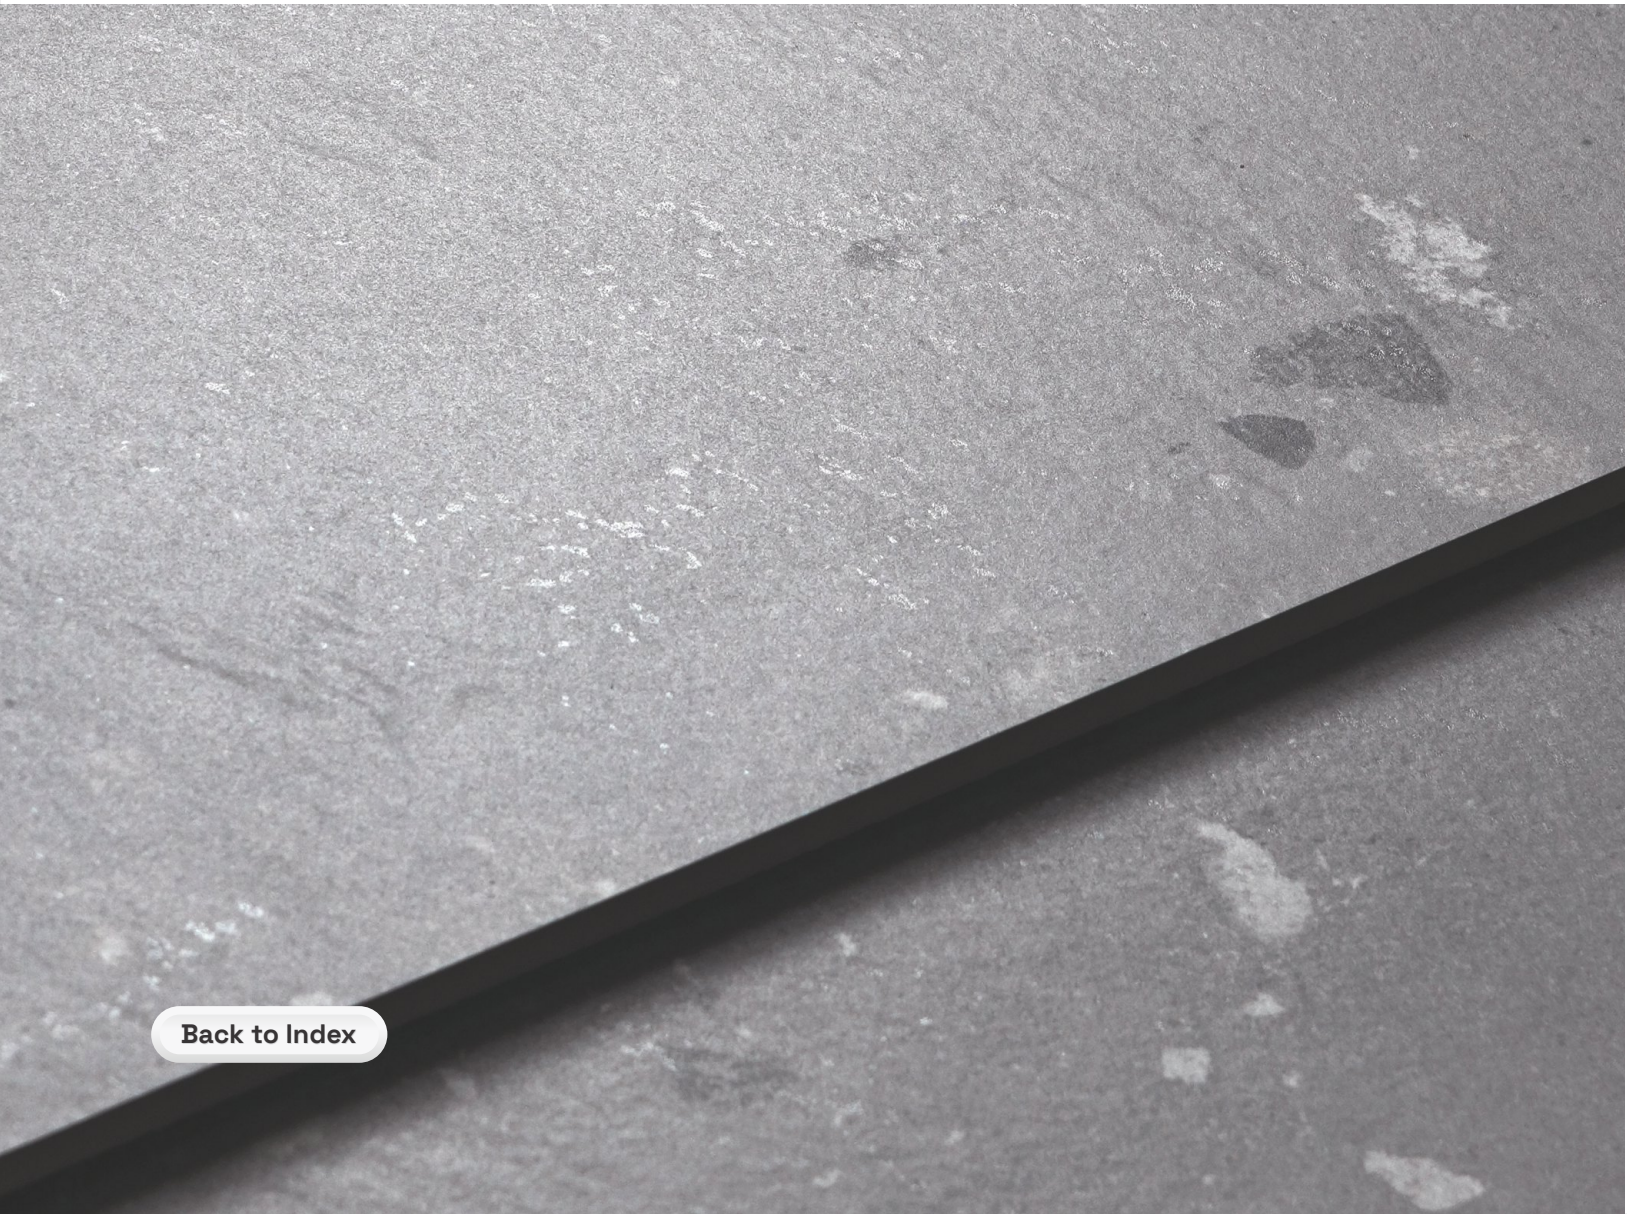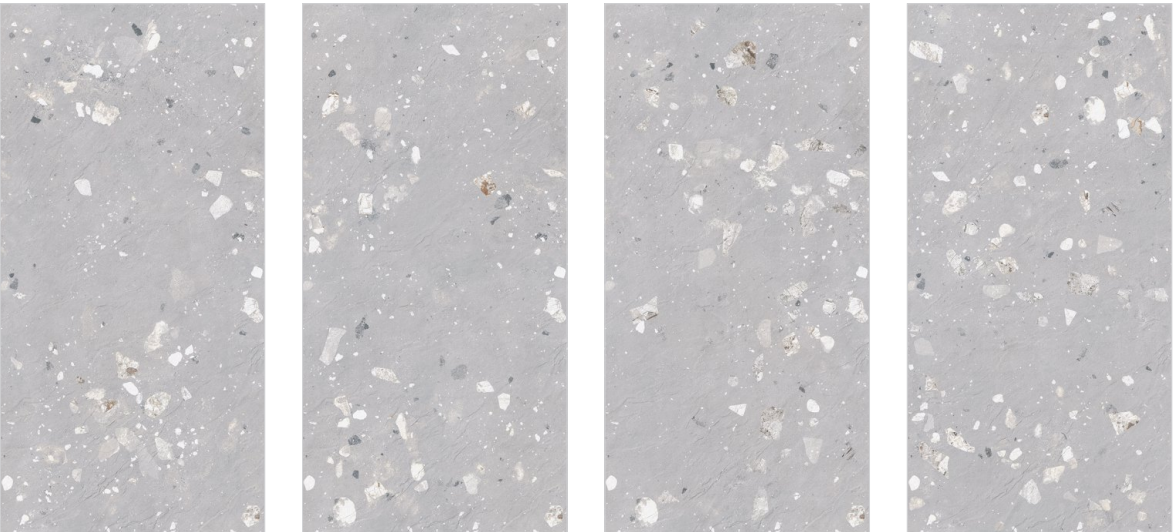

[Back to Index](#)

www.mottogroup.in

Cosmo Series /
Collection 2026 / 27

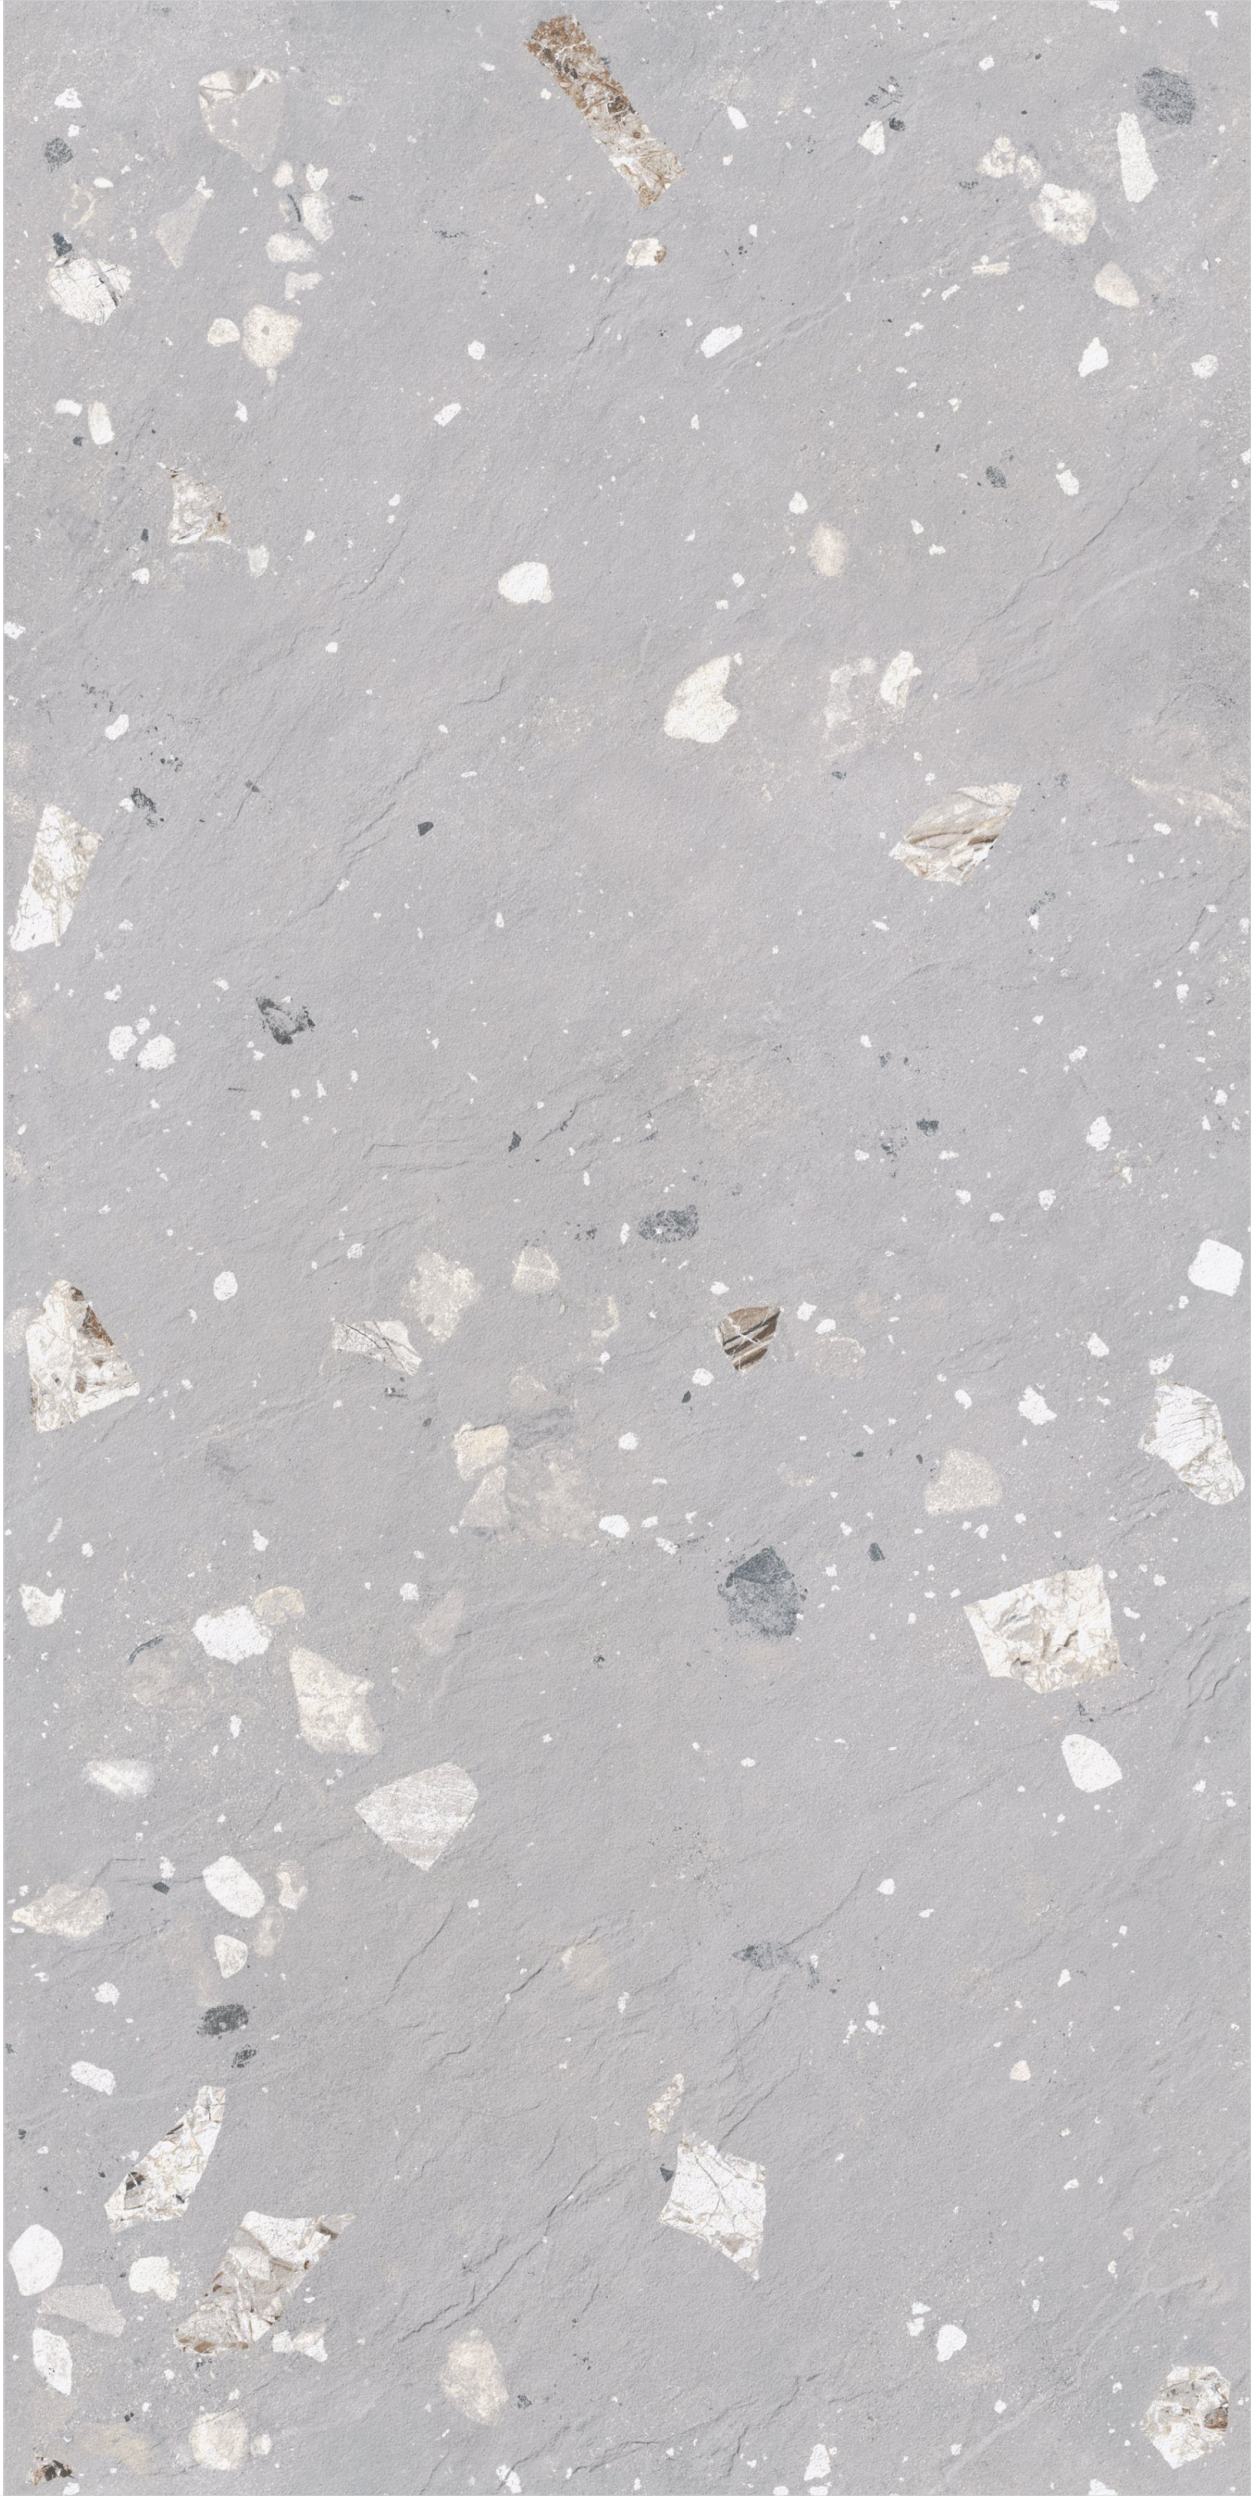





SCAN FOR
VIRTUAL
360°

Cosmo Grey
Digimatt 5.0
800x1600mm


MANUALLY TRANSPORTING
SLAB

Only for 1/4" Slabs
MOVING A SLAB


WATCH
INSTALLATION
PROCESS

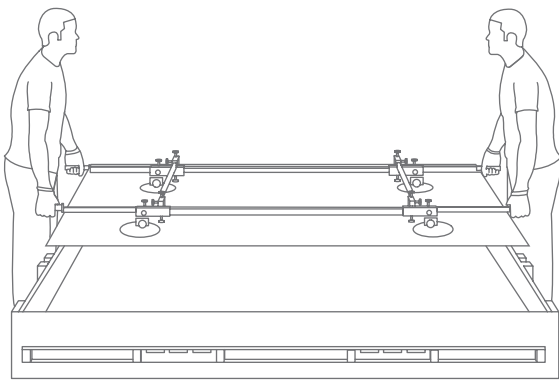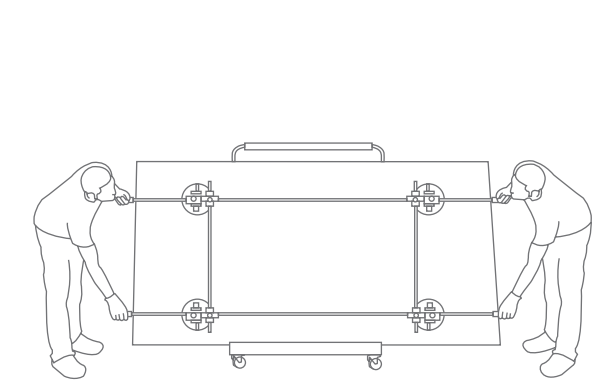

RAISING AN IMMODERATE SLAB ONTO A BENCH

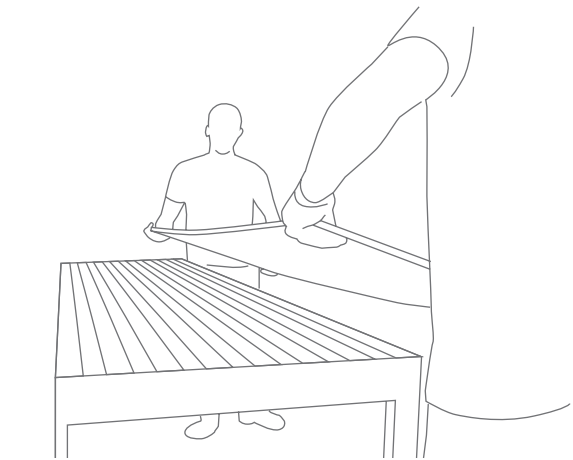


✗ INCORRECT

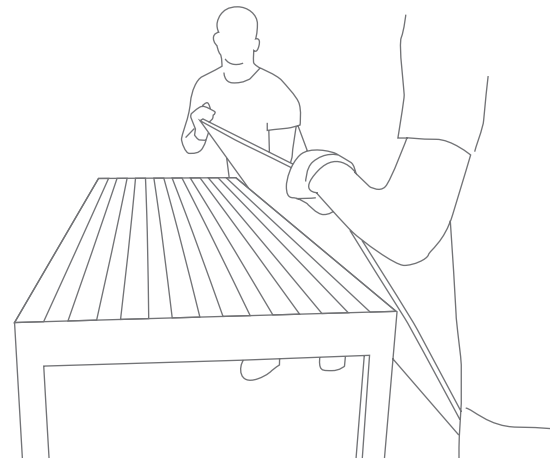


✓ CORRECT

HANDLING AN IMMODERATE SLAB FOR WALL

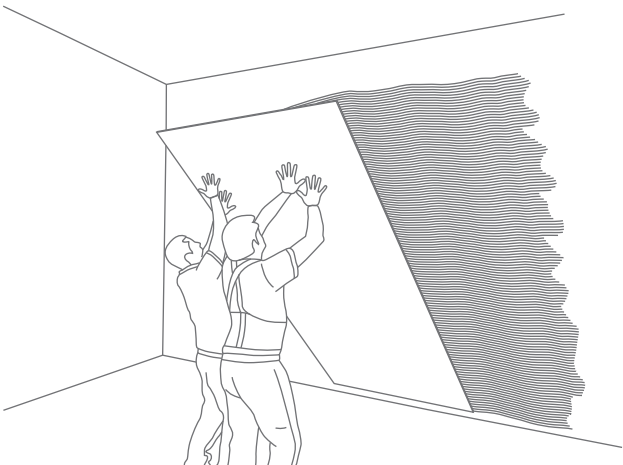



✗ INCORRECT

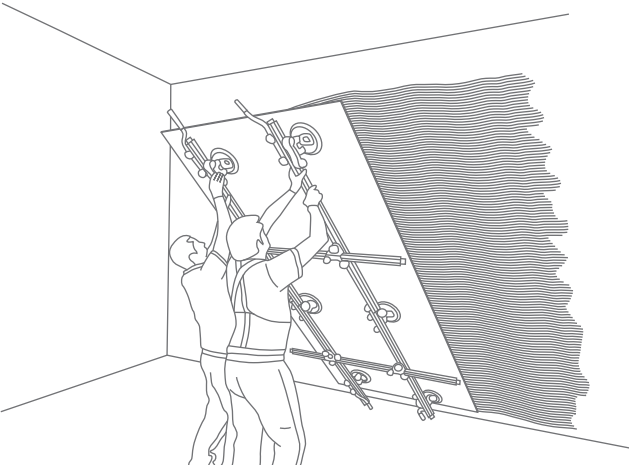

✓ CORRECT



WORKING WITH THE VARIOUS
VERSIONS OF SLAB

CUTTING WITH DIAMOND DISCS

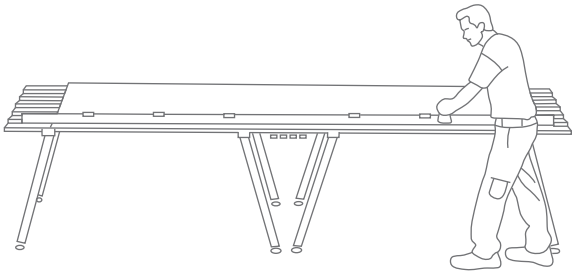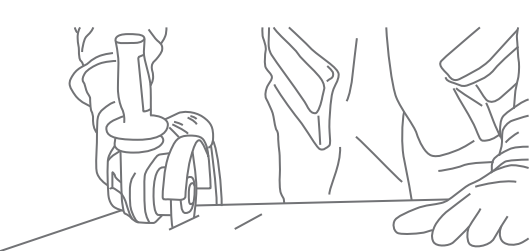


Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a flat base without any gaps underneath while cutting. without any gap underneath.

DRILLING

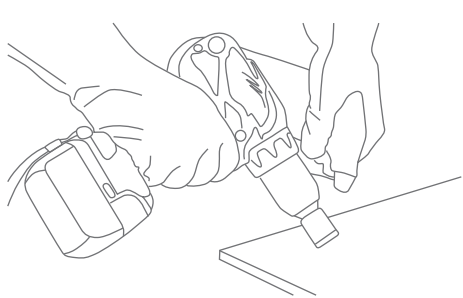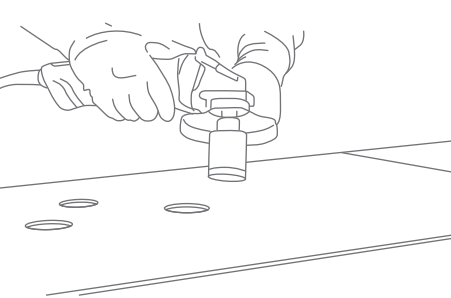

You can use cutting discs fitted to battery-operated screwdrivers, angle grinders, or electric drills as an alternative.


INTERNAL CUT/L-SHAPED CUT

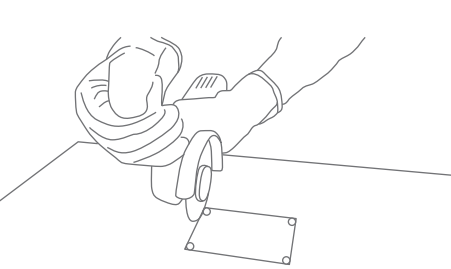

To get internal and L-shaped corners & to reduce the risk of breakage, cut 'o' at the vertex of the internal corners using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs and more, follow the instructions provided below:


- When using these tools:
- Cool the point being drilled with water.
 - Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on.
 - If you are using tungsten bits, start drilling at a low speed.
 - If you are using drills or screwdrivers, do not select hammer mode.

EDGE-FINISHING

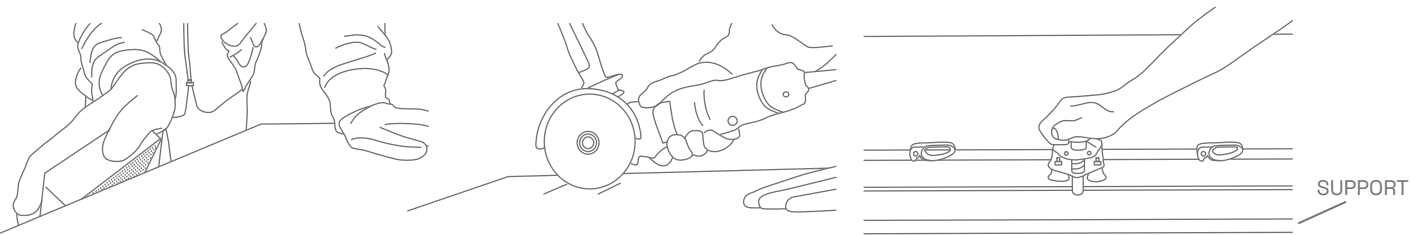


INSTRUCTIONS FOR
MANUAL INSTALLATION


SINGLE LAYER METHOD



DOUBLE-LAYER METHOD



COMPRESSING THE SLAB



IMPORTANT

All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles. We recommend a radius of more than 1/4" when the kitchen design allows, as it makes the countertop firmer.



✓ CORRECT



✗ INCORRECT



✗ INCORRECT



✗ INCORRECT

CLEANING & MAINTENANCE

Our products are non-porous (due to their high-quality raw materials, stringent production parameters, and state-of-the-art technology); hence, any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it an exceptiona shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPES OF STAINS	CHEMICAL PRODUCTS	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Baking Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Agents, Hydrochloric Acid
Cement	Acid	Hydrochloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydrochloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain be cleaned immediately/as soon as possible.

TECHNICAL
SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/2018 En14411 gr.bla	MOTTO VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length & Width	± 0.5%	± 0.2%	ISO 10545-2
Deviation in Thickness	± 5%	± 5%	ISO 10545-2
Straightness of Sides	± 0.5%	± 0.2%	ISO 10545-2
Rectangularity	± 0.5%	± 0.2%	ISO 10545-2
Surface Flatness	± 0.5%	± 0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	ΔE<0.30	ISO 10545-16
Glossiness	As per Mfg.	As Per Mfg.	Gloss Meter
Regulatory Properties			
Water Absorption	≤ 0.5 %	≤ 0.03 %	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of Rupture	Min.35N/mm²	Min.40N/mm²	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
Surface Mechanical Properties			
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Mohs Hardness	As per Mfg.	Min. class 4	BS EN 15771
Massive Mechanical Properties			
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.0x10 ⁻⁶	ISO 10545-8
Chemical Properties			
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
Safety Properties			
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING
DETAILS

Dimension (mm)	No. of Pcs/Box	Square Feet	Square Metre
800x1600mm	2 Pcs.	27.50 Sq. ft	2.55 Sq. Mtr.



MOTTO GROUP

8-A, National Highway, Sartanpar Road, At. Sartanpar,
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA

Mail. info@mottogroup.in, Web. www.mottogroup.in

Toll-free. 1800 123 2124

Call. +91 95123 80072