

COLLECTION  
2026 / 27



---

800x1600mm  
Digimatt 5.0

GRAINSTONE  
S E R I E S



## Setting Standards Since more than two decade of experience

We have been in the industry since 1999 and raising the standards in ceramic sector with our high standards and our certificates are the proof of that.



**MOTTO®**  
Tiles & Bathware

## About Company

Motto is one of the most dynamic & productive brands of the modern ceramic world that is brought to life by a visionary person Mr. Mahendra Patel. Over the years the company has developed manyfold.

Since 2004 - the inception year, to today we have expanded our reach to national & international arenas with a capillary presence in more than 70+ countries with 2500 satisfied customers.

Finest skills clubbed with state of the art technology have helped us to carve a niche, which is stamped by authorities as we are ISO 9001 : 2018 Certified. Overall the company has marked its position as the leading Manufacturer, Exporter and Supplier of the exquisite Ceramic Porcelain Tiles for Wall & Floor.



## Grainstone Series Introduction

**Bringing to you Earth's most authentic beauty in a craftful manner.**

Inspired by the raw textures of natural stones and sculpting the timeless tales of beauty, we bring to you a Series that's real and rich! Create a depthful scene of authenticity in your space with our 800x1600mm surfaces, whose Digimatt 5.0 look adds a tactile allure.

Perfected with digital printing technology, these surfaces not only add a raw look but also balance texture and depth, giving a surreal experience that brings you closer to nature. Not only that, you can also add an enduring, seamless look through a format refined over time and narrated with originality.



01. 800x1600mm

Outstanding  
colors of  
inspiration!





# Surface Introduction

Sculpted by  
nature,  
perfectly

A surface that brings the beauty of both refined & authentic effects to your space, the Grainstone Series emphasizes your space with a surreal, raw look. While the Digitmatt 5.0 brings in a rustic effect, you can also emphasize details through the textured look. And to give momentum to its brilliance, the surface has been backed with a 9mm thickness that adds to its durability and strength, effortlessly.



Impactful  
Sturdy  
Impressive





For spaces  
that demand  
practicality!

Designed to impress you with its ease of maintenance!

With features that promote minimal maintenance, the Grainstone Series offers a range of surfaces that are engineered with innate resistance to daily wear and tear. Let the surfaces craft a magical experience in your space with their absolute excellence.

With a diverse range of applications, from areas with medium footfall to those that demand practical integration, this Series proves to be an ideal choice.

Unique Features:

- 

Frost Resistance
- 

Thermal Impact
- 

High Load Resistance
- 

Fire Proof
- 

Easy to Install
- 

Ecological Finish
- 

Chemical Resistant

Product Applications

- 

Residential Areas
- 

Public Spaces
- 

Malls
- 

Airports
- 

Restaurants
- 

Hotels
- 

Office
- 

Train Station






# Table of Contents



**Grainstone Crema**  
800x1600mm  
Digimatt 5.0

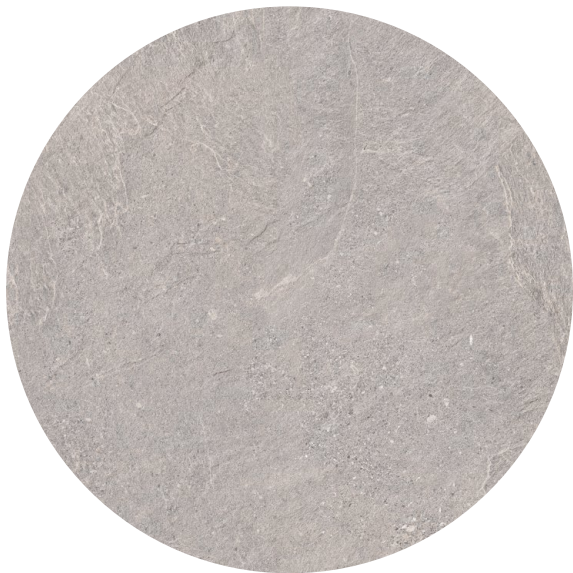

**Grainstone Taupe**  
800x1600mm  
Digimatt 5.0



**Grainstone Siver**  
800x1600mm  
Digimatt 5.0



**Grainstone Nero**  
800x1600mm  
Digimatt 5.0



**Grainstone Brown**  
800x1600mm  
Digimatt 5.0



**Grainstone Crystal**  
800x1600mm  
Digimatt 5.0





Size: 800x1600mm  
Surface: Digimatt 5.0

MOTTO®  
Tiles & Bathware

## Grainstone Crema

R-6



[Back to Index](#)





Grainstone Crema  
Digimatt 5.0  
800x1600mm

SCAN FOR  
VIRTUAL  
360°







Size: 800x1600mm  
Surface: Digimatt 5.0

# Grainstone Taupe

R-6



[Back to Index](#)

[www.mottogroup.in](http://www.mottogroup.in)

Grainstone Series /  
Collection 2026 / 27








SCAN FOR  
VIRTUAL  
360°

Grainstone Taupe  
Digimatt 5.0  
800x1600mm



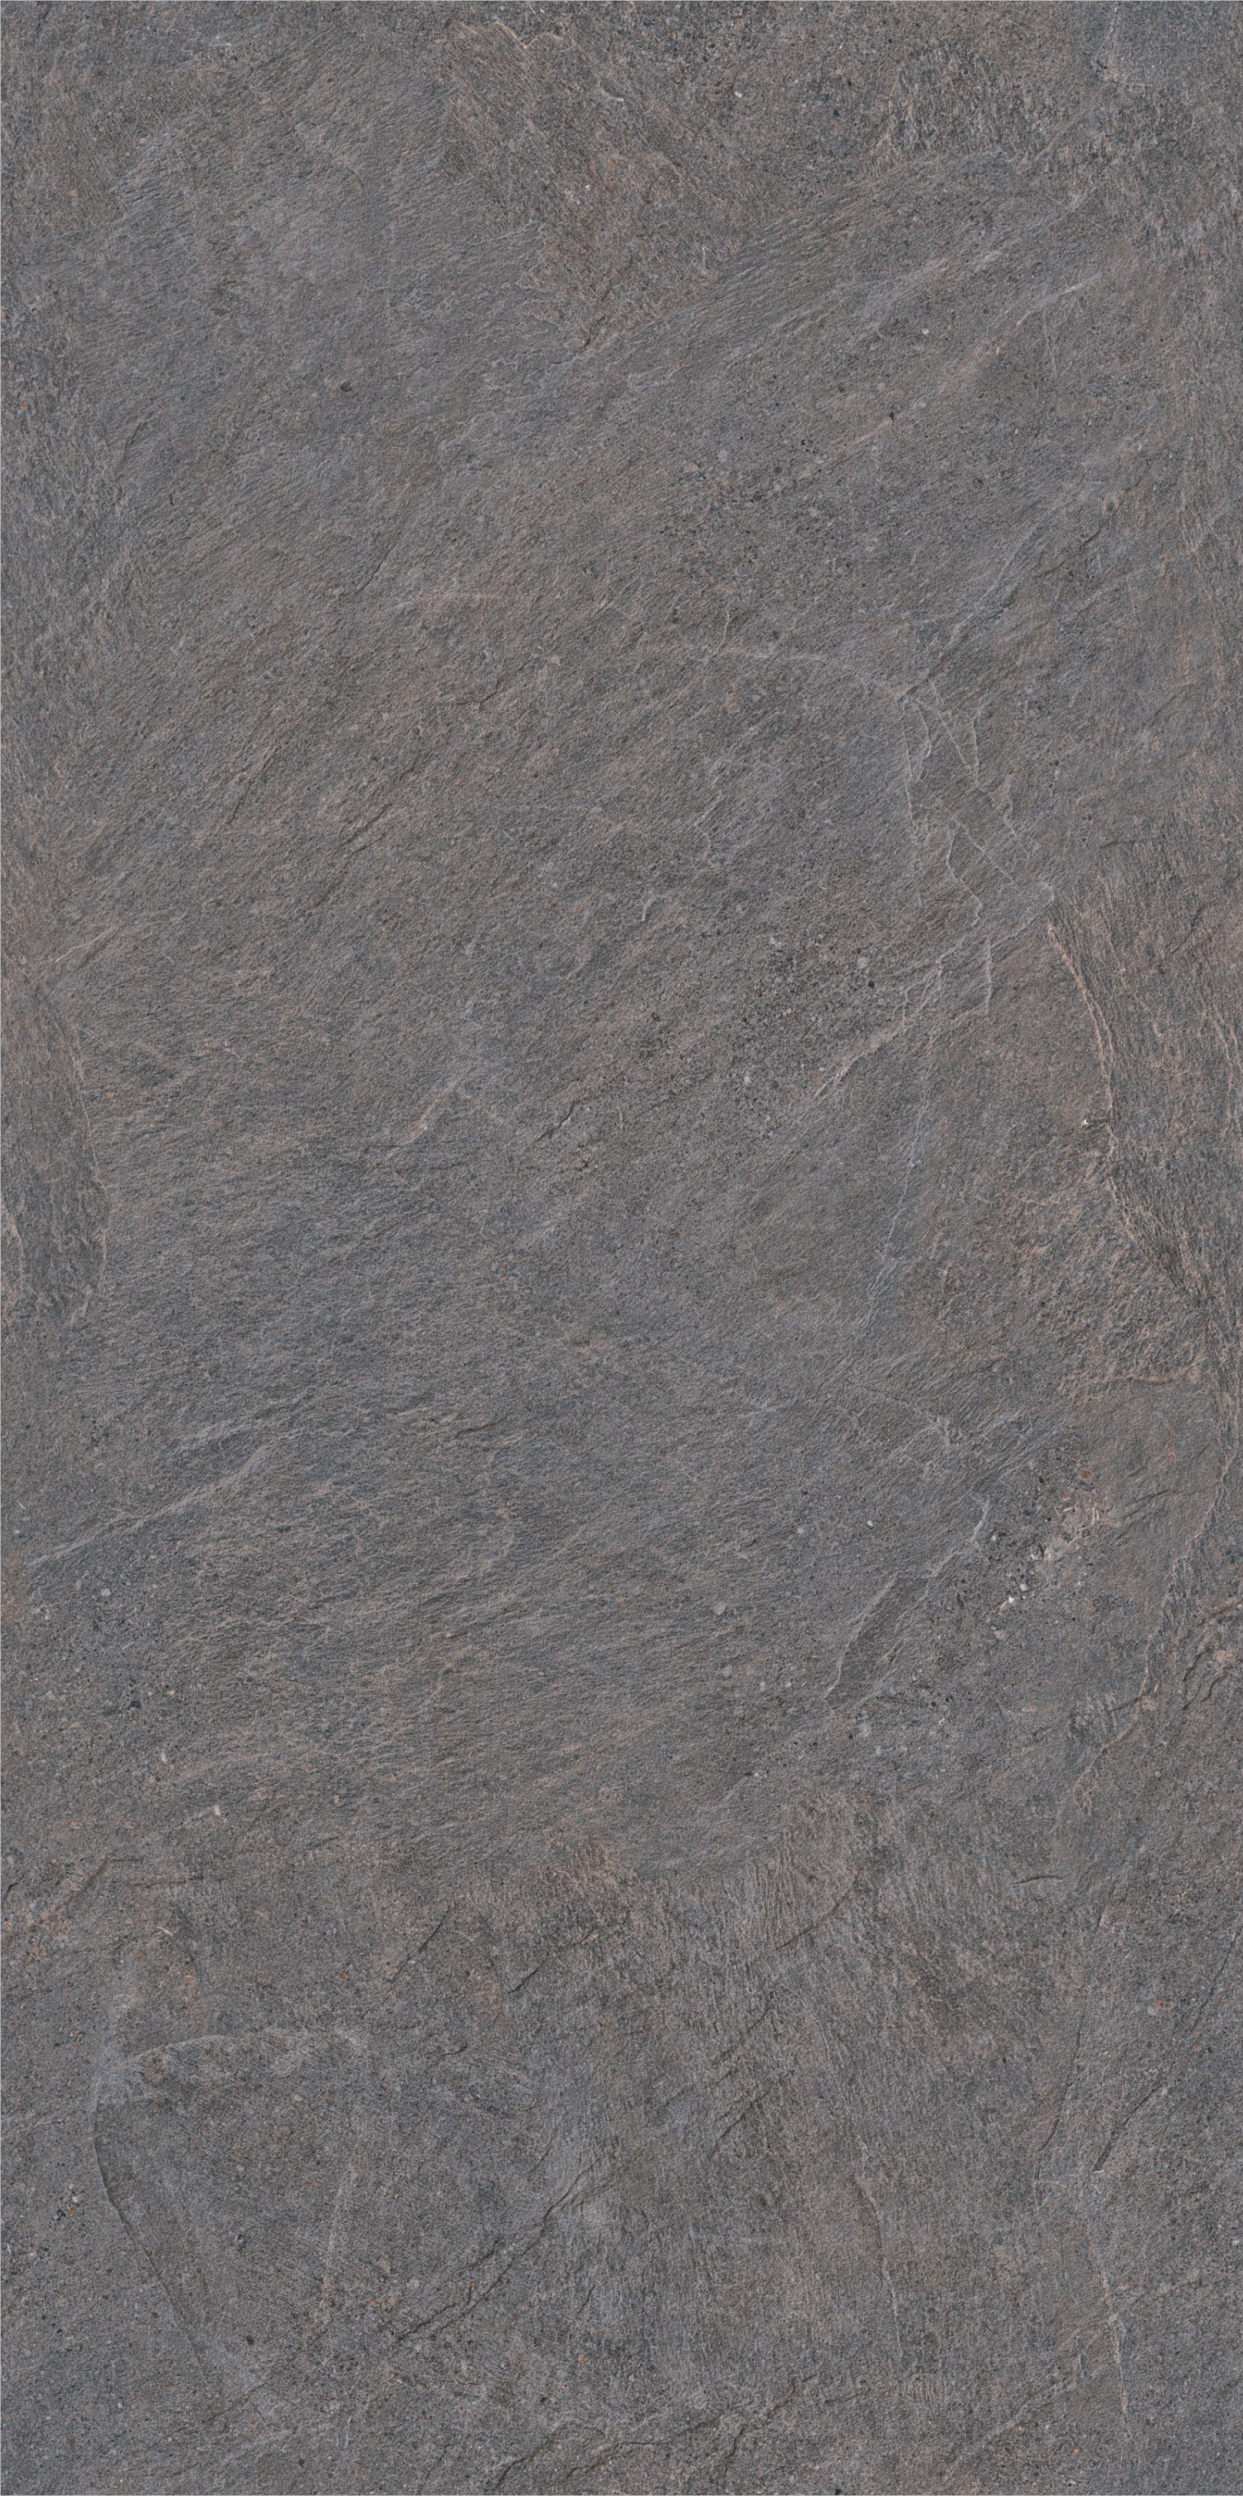

www.mottogroup.in

Grainstone Series /  
Collection 2026 / 27

Size: 800x1600mm  
Surface: Digimatt 5.0

MOTTO®  
Tiles & Bathware


## Grainstone Brown

R-6



[Back to Index](#)



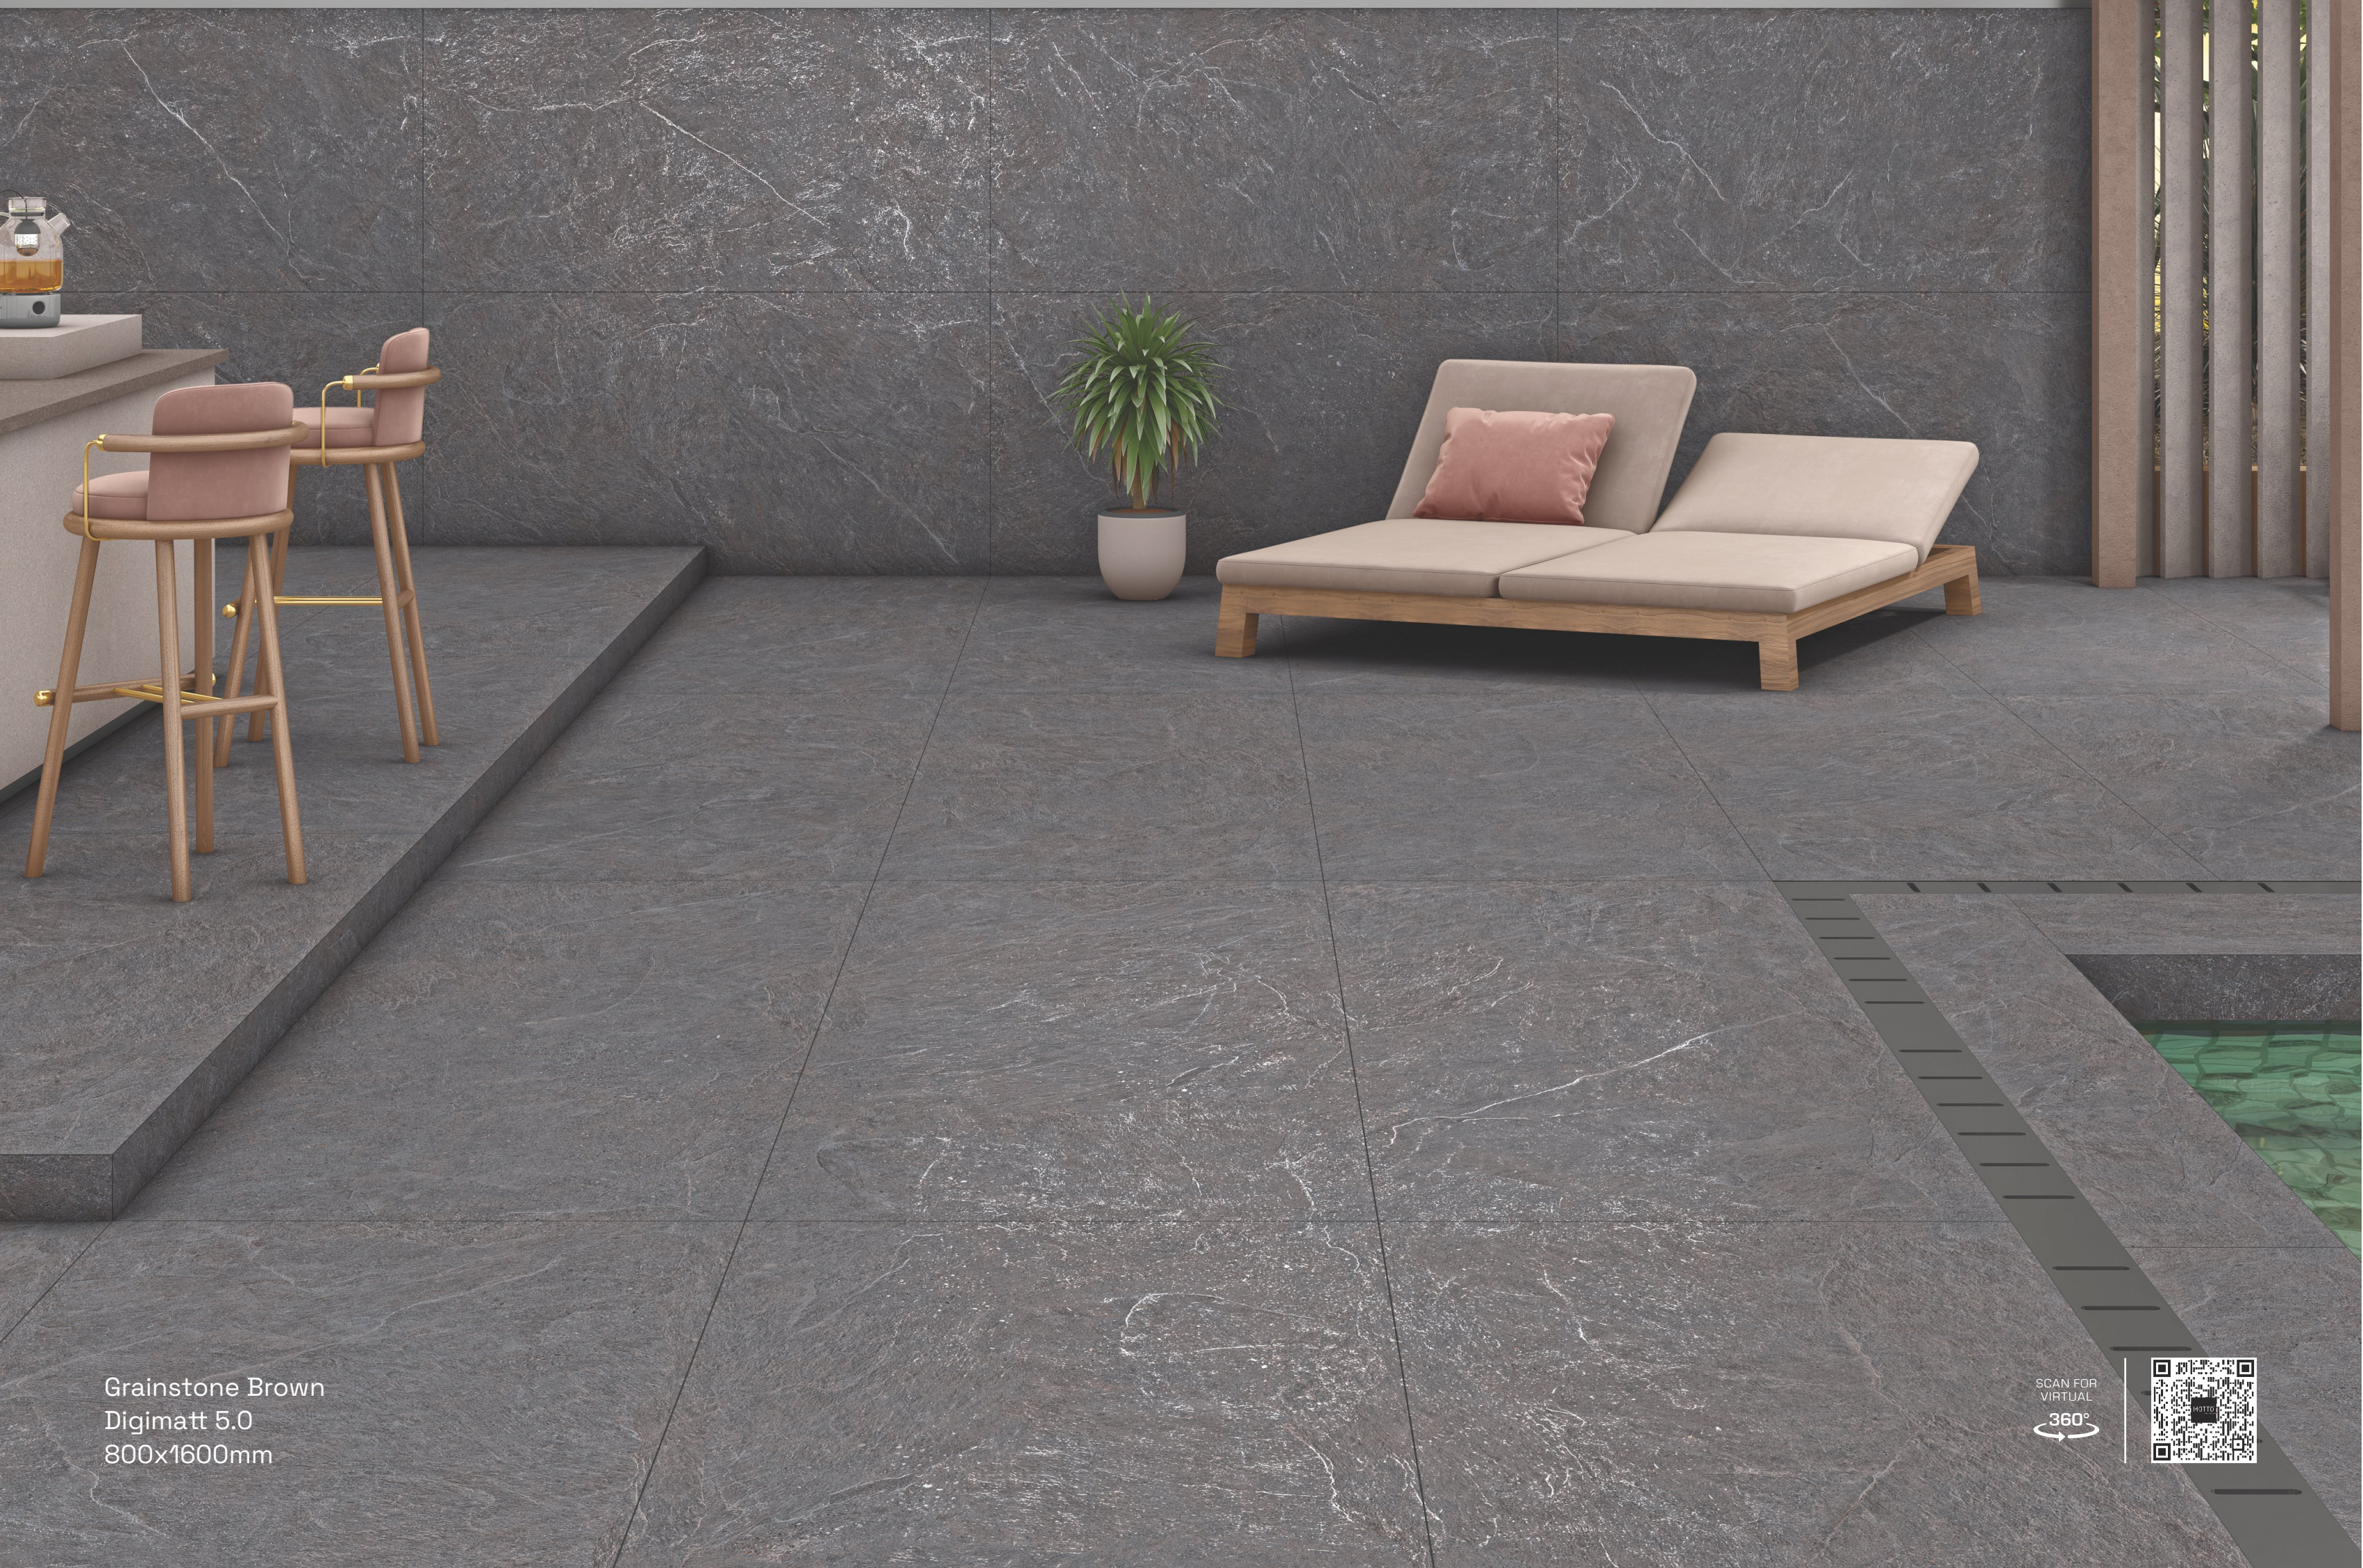

Grainstone Brown  
Digimatt 5.0  
800x1600mm

SCAN FOR  
VIRTUAL  
360°







Size: 800x1600mm  
Surface: Digimatt 5.0

# Grainstone Crystal

R-6



[Back to Index](#)

[www.mottogroup.in](http://www.mottogroup.in)

Grainstone Series /  
Collection 2026 / 27







SCAN FOR  
VIRTUAL  
360°

Grainstone Crystal  
Digimatt 5.0  
800x1600mm





www.mottogroup.in

Grainstone Series /  
Collection 2026 / 27

Size: 800x1600mm  
Surface: Digimatt 5.0

MOTTO®  
Tiles & Bathware

## Grainstone Siver

R-6



[Back to Index](#)





Grainstone Siver  
Digimatt 5.0  
800x1600mm

SCAN FOR  
VIRTUAL  
360°








Size: 800x1600mm  
Surface: Digimatt 5.0

Grainstone Nero

R-6

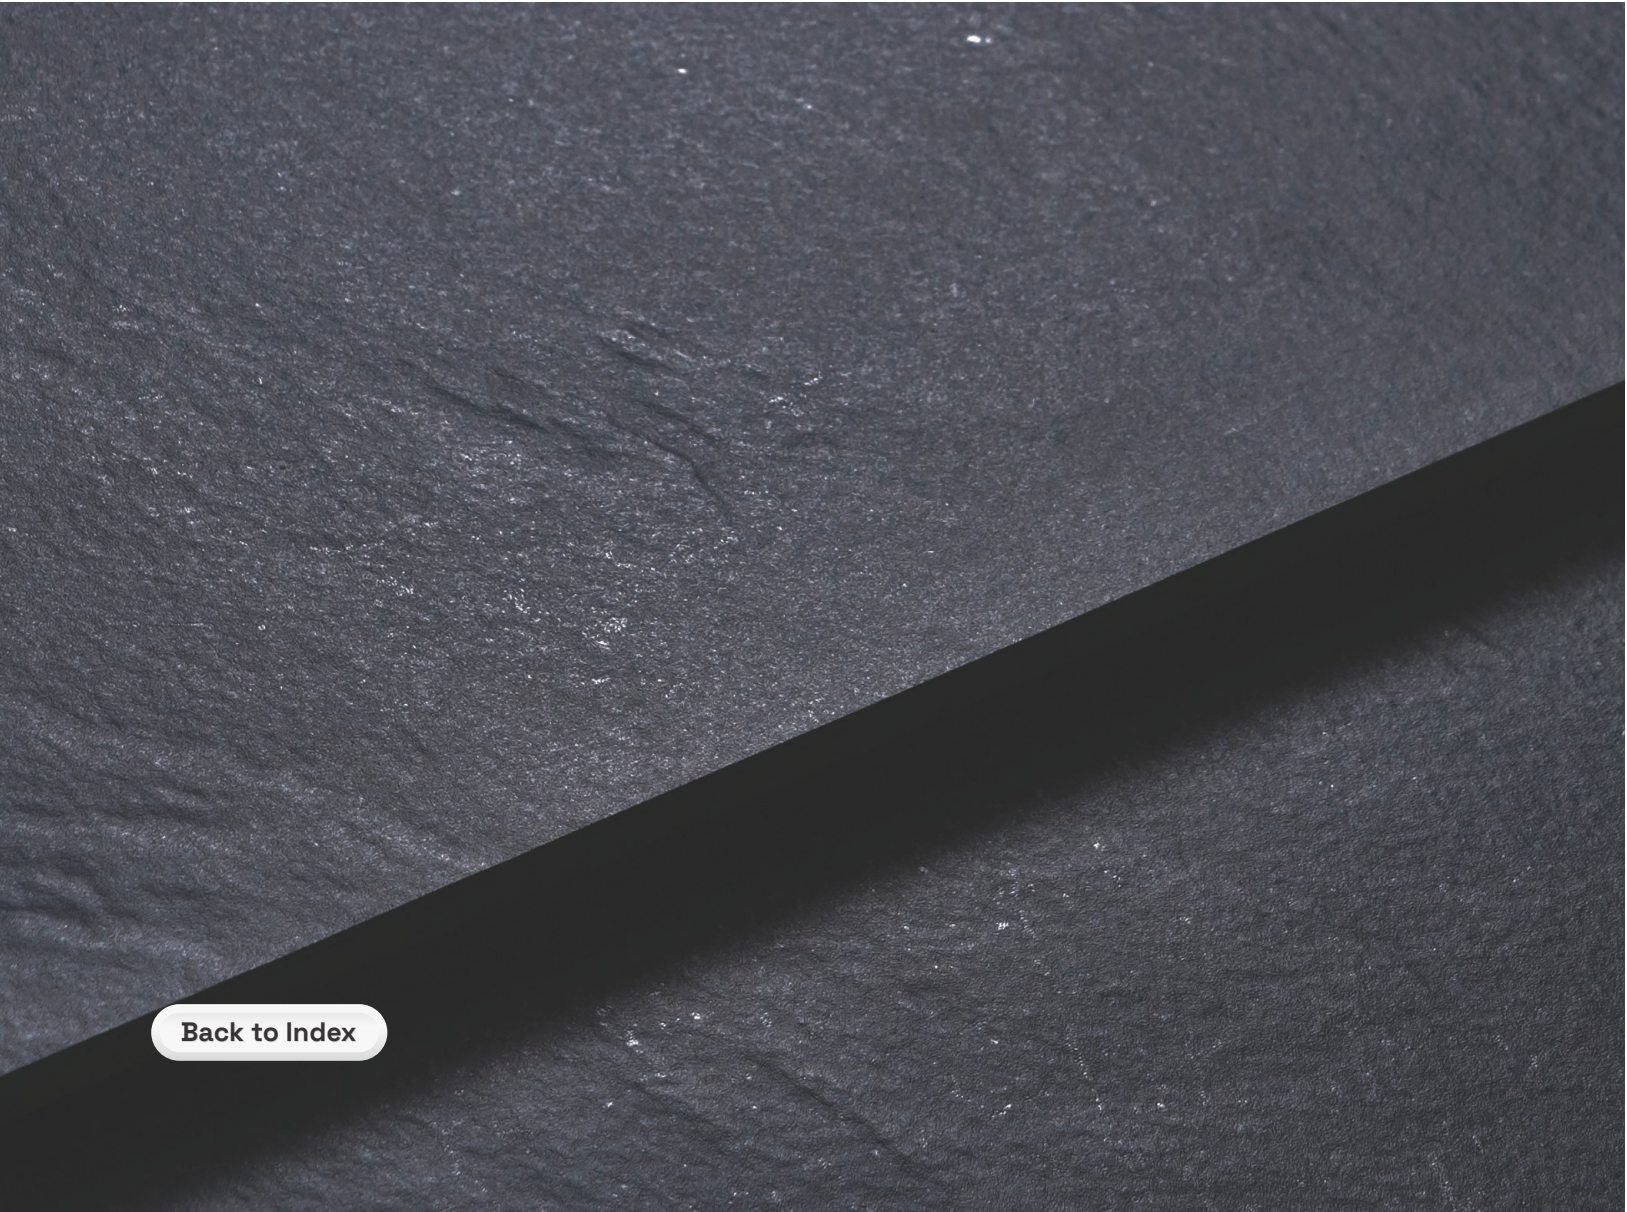

[Back to Index](#)

[www.mottogroup.in](http://www.mottogroup.in)







Grainstone Nero  
Digimatt 5.0  
800x1600mm



SCAN FOR  
VIRTUAL  
360°





MANUALLY TRANSPORTING  
SLAB


Only for 1/4" Slabs

MOVING A SLAB


WATCH  
INSTALLATION  
PROCESS

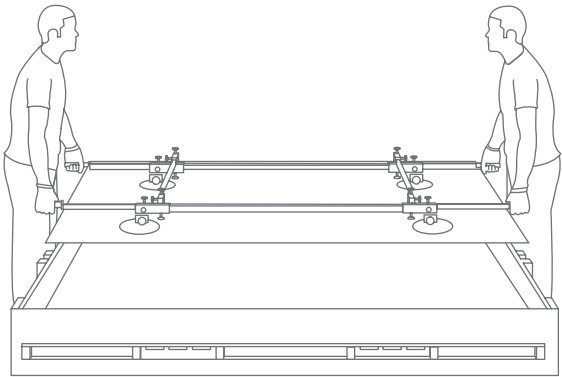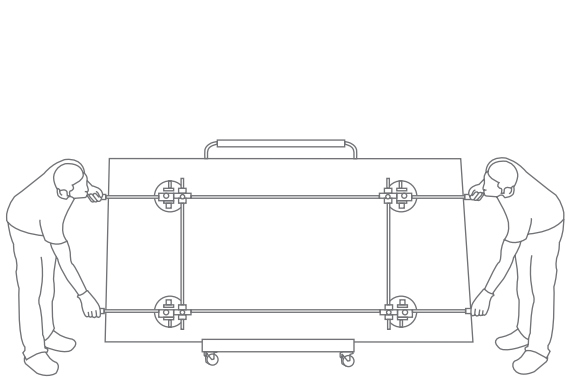

RAISING AN IMMODERATE SLAB ONTO A BENCH

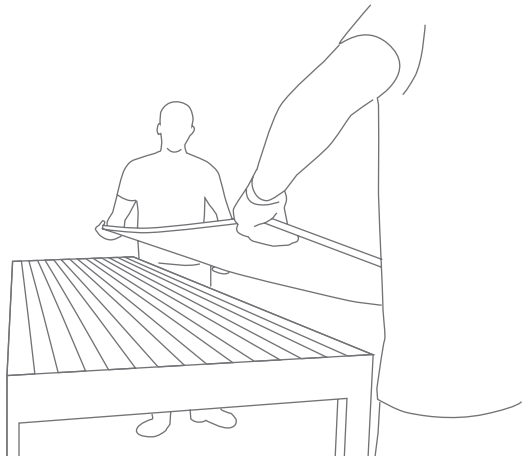


✗ INCORRECT

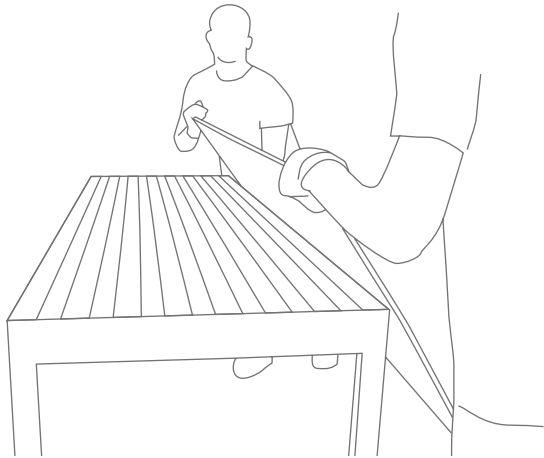


✓ CORRECT

HANDLING AN IMMODERATE SLAB FOR WALL

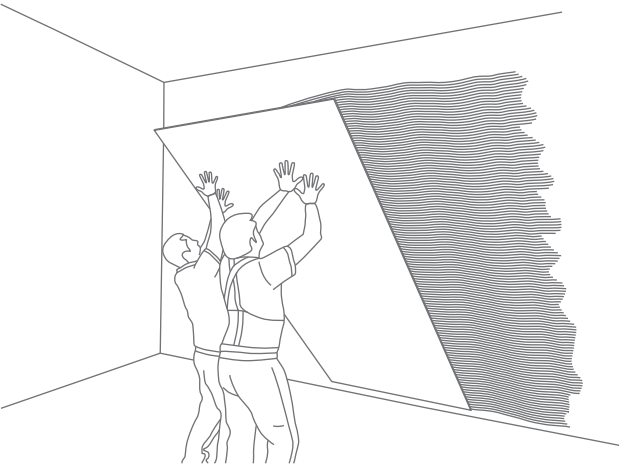


✗ INCORRECT

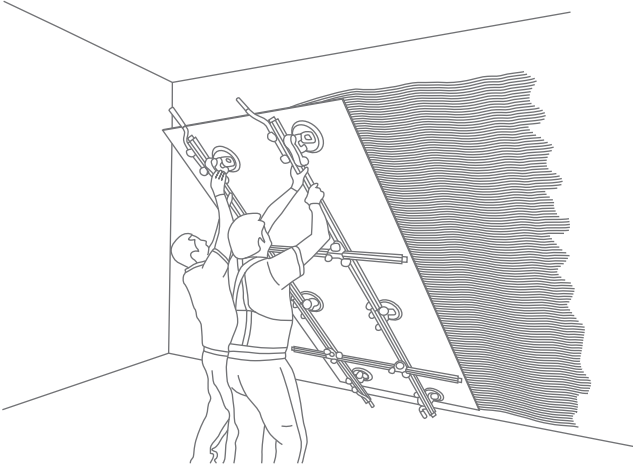

✓ CORRECT



WORKING WITH THE VARIOUS  
VERSIONS OF SLAB

CUTTING WITH DIAMOND DISCS

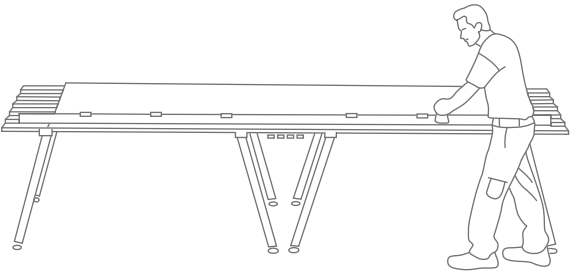


Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a flat base without any gaps underneath while cutting, without any gap underneath.

DRILLING

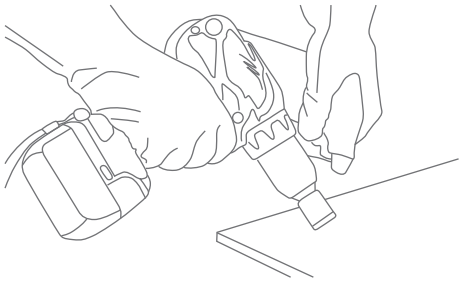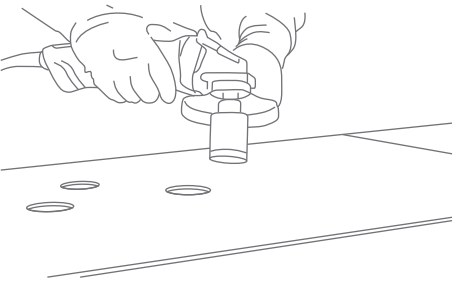

You can use cutting discs fitted to battery-operated screwdrivers, angle grinders, or electric drills as an alternative.




INTERNAL CUT/L-SHAPED CUT

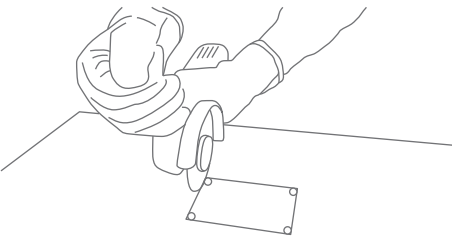

To get internal and L-shaped corners & to reduce the risk of breakage, cut 'o' at the vertex of the internal corners using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs and more, follow the instructions provided below:

- When using these tools:
- Cool the point being drilled with water.
  - Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on.
  - If you are using tungsten bits, start drilling at a low speed.
  - If you are using drills or screwdrivers, do not select hammer mode.


EDGE-FINISHING

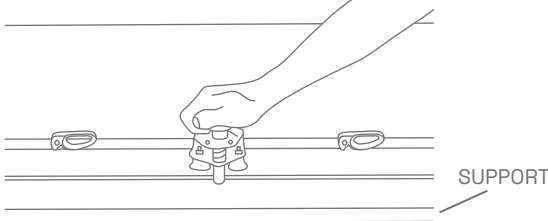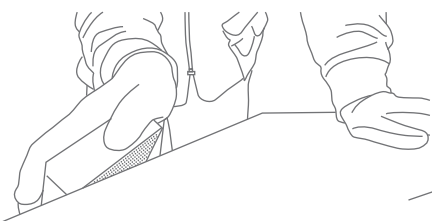




INSTRUCTIONS FOR  
MANUAL INSTALLATION


SINGLE LAYER METHOD



DOUBLE-LAYER METHOD



COMPRESSING THE SLAB



IMPORTANT

All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles. We recommend a radius of more than 1/4" when the kitchen design allows, as it makes the countertop firmer.



✓ CORRECT



✗ INCORRECT



✗ INCORRECT



✗ INCORRECT

CLEANING & MAINTENANCE

Our products are non-porous (due to their high-quality raw materials, stringent production parameters, and state-of-the-art technology); hence, any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it an exceptiona shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

| TYPES OF STAINS | CHEMICAL PRODUCTS  | EXAMPLE                                    |
|-----------------|--------------------|--------------------------------------------|
| Grease          | Alkaline - Solvent | Detergent                                  |
| Oil             | Solvent            | Ammonia, Baking Soda                       |
| Ink             | Oxidant - Solvent  | Alcohol, Liquid Bleach, Nail Paint Remover |
| Rust            | Acid               | Hydrochloric Acid, Vinegar, Red Harpic     |
| Lime            | Acid               | Descaling Agents, Hydrochloric Acid        |
| Cement          | Acid               | Hydrochloric Acid                          |
| Wine            | Alkaline           | Ammonia, Liquid Bleach                     |
| Coffee          | Alkaline - Solvent | Ammonia, Liquid Bleach                     |
| Rubber          | Solvent            | Alcohol, Thinner                           |
| Plaster         | Acid               | Hydrochloric Acid                          |
| Candle Wax      | Solvent            | Alcohol, Thinner                           |
| Iodine          | Oxidant            | Liquid Bleach                              |
| Blood           | Oxidant            | Liquid Bleach                              |
| Ice Cream       | Alkaline           | Liquid Bleach                              |

Note: It is recommended that any kind of stain be cleaned immediately/as soon as possible.

TECHNICAL  
SPECIFICATIONS

| CHARACTERISTICS               | STANDARD AS PER<br>ISO-13006/2018<br>En14411 gr.bla | MOTTO VALUE               | TEST METHOD  |
|-------------------------------|-----------------------------------------------------|---------------------------|--------------|
| Regulatory Properties         |                                                     |                           |              |
| Deviation in Length & Width   | ± 0.5%                                              | ± 0.2%                    | ISO 10545-2  |
| Deviation in Thickness        | ± 5%                                                | ± 5%                      | ISO 10545-2  |
| Straightness of Sides         | ± 0.5%                                              | ± 0.2%                    | ISO 10545-2  |
| Rectangularity                | ± 0.5%                                              | ± 0.2%                    | ISO 10545-2  |
| Surface Flatness              | ± 0.5%                                              | ± 0.3%                    | ISO 10545-2  |
| Colour Difference             | ΔE<1.00                                             | ΔE<0.30                   | ISO 10545-16 |
| Glossiness                    | As per Mfg.                                         | As Per Mfg.               | Gloss Meter  |
| Regulatory Properties         |                                                     |                           |              |
| Water Absorption              | ≤ 0.5 %                                             | ≤ 0.03 %                  | ISO 10545-3  |
| Apparent Density              | As Per Mfg.                                         | >2.20 g/cc                | ISO 10545-3  |
| Massive Mechanical Properties |                                                     |                           |              |
| Modulus of Rupture            | Min.35N/mm²                                         | Min.40N/mm²               | ISO 10545-4  |
| Breaking Strength             | Min. 1300 N                                         | Min. 2000 N               | ISO 10545-4  |
| Impact Resistance             | As per Mfg.                                         | Min. 0.55                 | ISO 10545-4  |
| Surface Mechanical Properties |                                                     |                           |              |
| Surface Abrasion Resistance   | As per Mfg.                                         | Min. class 3              | ISO 10545-7  |
| Mohs Hardness                 | As per Mfg.                                         | Min. class 4              | BS EN 15771  |
| Massive Mechanical Properties |                                                     |                           |              |
| Frost Resistance              | As Per Mfg.                                         | Frost Proof               | ISO 10545-12 |
| Thermal Shock Resistance      | Min. 10 Cycle                                       | Min. 10 Cycle             | ISO 10545-9  |
| Moisture Expansion            | Max. 0.6mm/m                                        | Max. 0.02mm/m             | ISO 10545-10 |
| Thermal Expansion             | Max. 9.0 x 10 <sup>-6</sup>                         | Max. 6.0x10 <sup>-6</sup> | ISO 10545-8  |
| Chemical Properties           |                                                     |                           |              |
| Chemical Resistance           | As Per Mfg.                                         | No Damage                 | ISO 10545-13 |
| Stain Resistance              | Resistant                                           | Resistant                 | ISO 10545-14 |
| Safety Properties             |                                                     |                           |              |
| Slip Resistance               | As per Mfg.                                         | N. A.                     | DIN 51130    |
| Fire Resistance               | As per Mfg.                                         | Fire Proof                | N. A.        |

PACKING  
DETAILS

| Dimension (mm) | No. of Pcs/Box | Square Feet  | Square Metre  |
|----------------|----------------|--------------|---------------|
| 800x1600mm     | 2 Pcs.         | 27.50 Sq. ft | 2.55 Sq. Mtr. |





**MOTTO GROUP**

8-A, National Highway, Sartanpar Road, At. Sartanpar,  
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA

Mail. [info@mottogroup.in](mailto:info@mottogroup.in), Web. [www.mottogroup.in](http://www.mottogroup.in)

Toll-free. 1800 123 2124

Call. +91 95123 80072