



BOUNDLESS BEAUTY



BALI STONE
SERIES

|

800x2400mm

15mm Thickness

MOTTO

FUTURE SURFACES

ABOUT US

Motto is one of the most dynamic & productive brands of the modern ceramic world that is brought to life by a visionary person Mr. Mahendra Patel. Over the years the company has developed manifold.

Since 2004 - the inception year, to today we have expanded our reach to national & international arenas with a capillary presence in more than 70+ countries with 2500 satisfied customers.

Finest skills clubbed with state of the art technology have helped us to carve a niche, which is stamped by authorities as we are ISO 9001 : 2018 Certified. Overall the company has marked its position as the leading Manufacturer, Exporter and Supplier of the exquisite Ceramic Porcelain Tiles for Wall & Floor.



Italian Technology



FLEXIBLE BODY

BASK IN BALISTONE'S UNIQUE GRANDEUR

Balistone collection is designed exclusively to offer an experience that envelops you in timeless sophistication.

Each piece is a statement of artistic expression, created to elevate any of your space. The intricate designs and flawless finishes reflect the dedication to quality Balistone stands for.

BALI STONE
SERIES



FULL BODY
S E R I E S

DISCOVER REGAL SURFACES


These surfaces exude majesty, creating a welcoming ambiance. Infuse your space with minimalist modernism and allow Balistone to reflect your style.



15mm THICKNESS

These surfaces are incredibly durable, easy to maintain, and require minimum effort to keep them looking pristine.

AVAILABLE IN A
MYRIAD OF **COLORS**
AND **TEXTURES**,
THESE TILES OFFER
ENDLESS POSSIBILITIES
FOR CREATING SPACES
THAT **INSPIRE**.

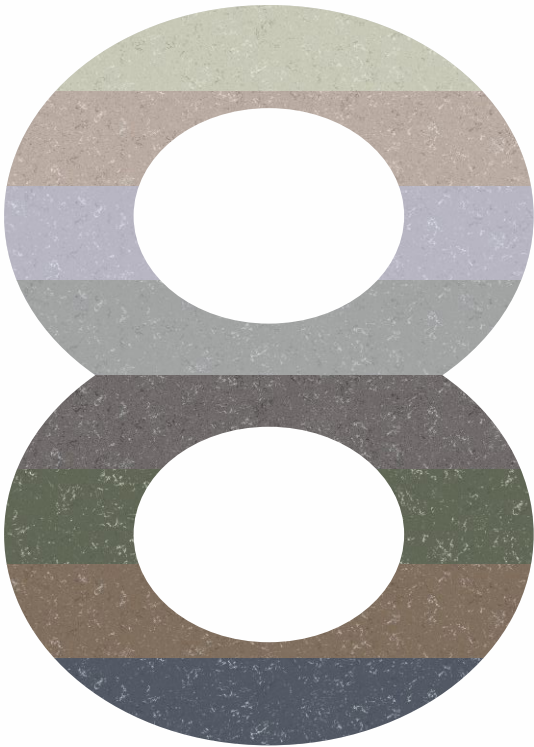

SIZE: 800x2400mm
THICKNESS: 15mm
FINISH: MATT

Perfect for any setting, these tiles make
a statement of refine taste, ensuring
your spaces remain stunning for years
to come.




EDGE PROFILES



Squared
ridge at 45°



Rounded
ridge at 45°




Straight
squared ridge



Rounded
straight ridge




Double straight
squared ridge



Double straight
rounded ridge

JOINT POSSIBILITIES



Birds beak



45° corner



Soft corner

APPLICATION POSSIBILITIES

These surfaces seamlessly integrate with any architectural style, making them versatile and ideal for any setting.



Stair Case



Bathroom Vanities



Kitchen Counter Top



Dining Area

- Living Room

TV Room

Study Table

Flooring
- Residential Areas

Commercial Areas



Children’s Room

Bedroom Area

INDEX

	BALISTONE ROYAL BLUE
	BALISTONE ASH
	BALISTONE RAHINO
	BALISTONE FOG
	BALISTONE MOSS
	BALISTONE LICHİ
	BALISTONE GREEN
	BALISTONE PEARL



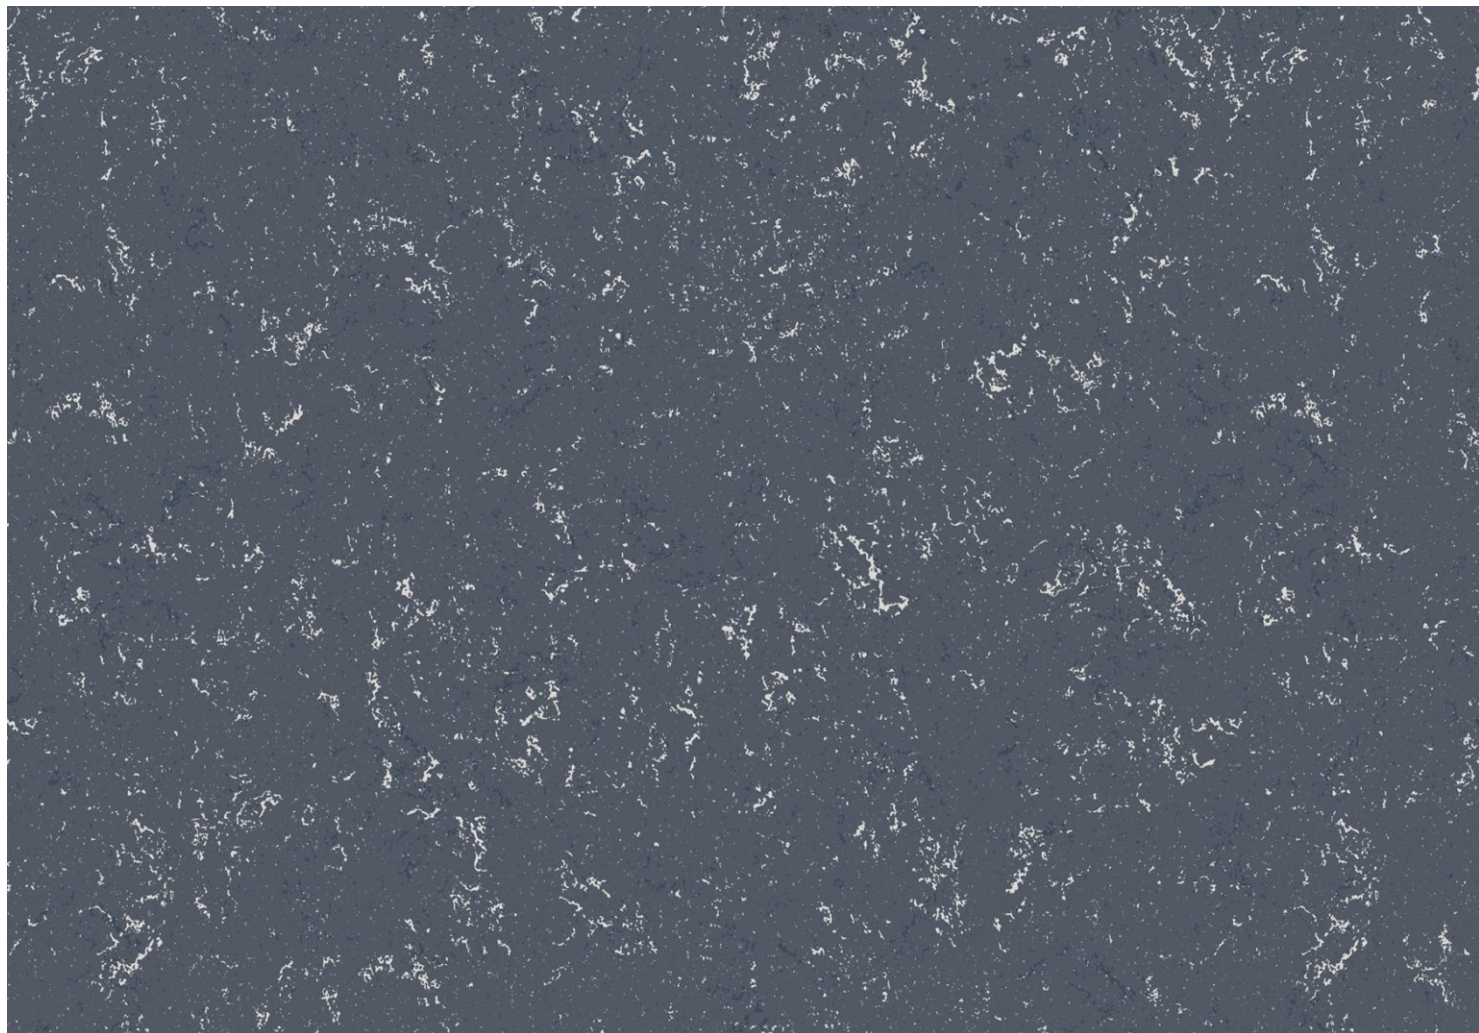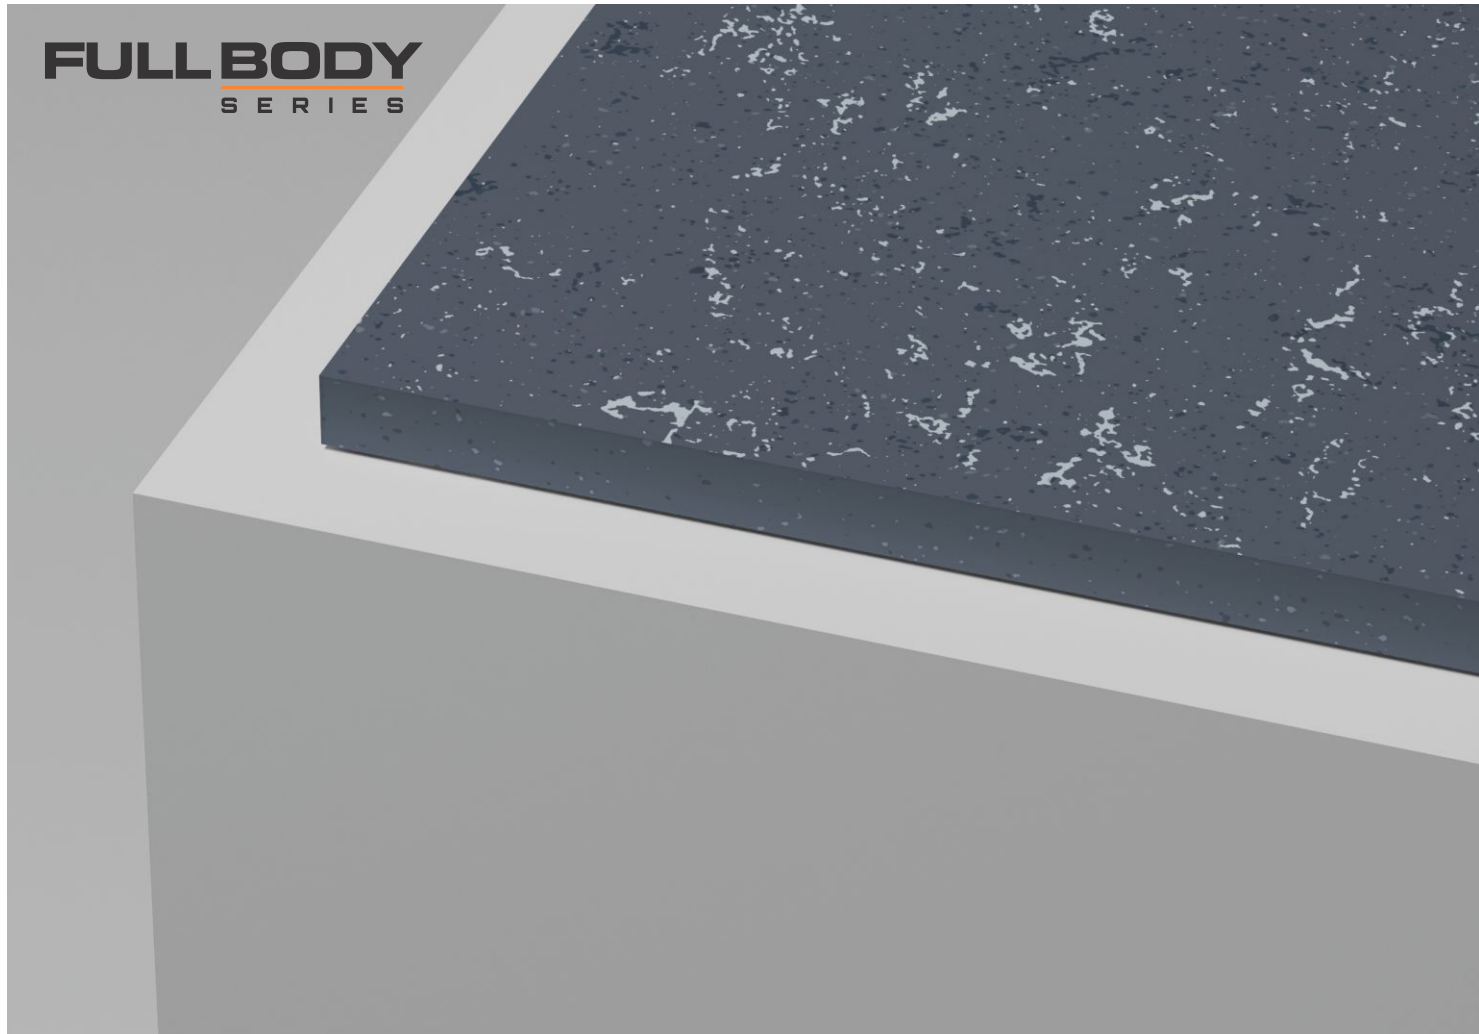

BALI STONE
SERIES




**BALISTONE
ROYAL BLUE**

SIZE: **800x2400mm**
THICKNESS: **15mm**
FINISH: **MATT**

SCAN FOR
VIRTUAL
360°





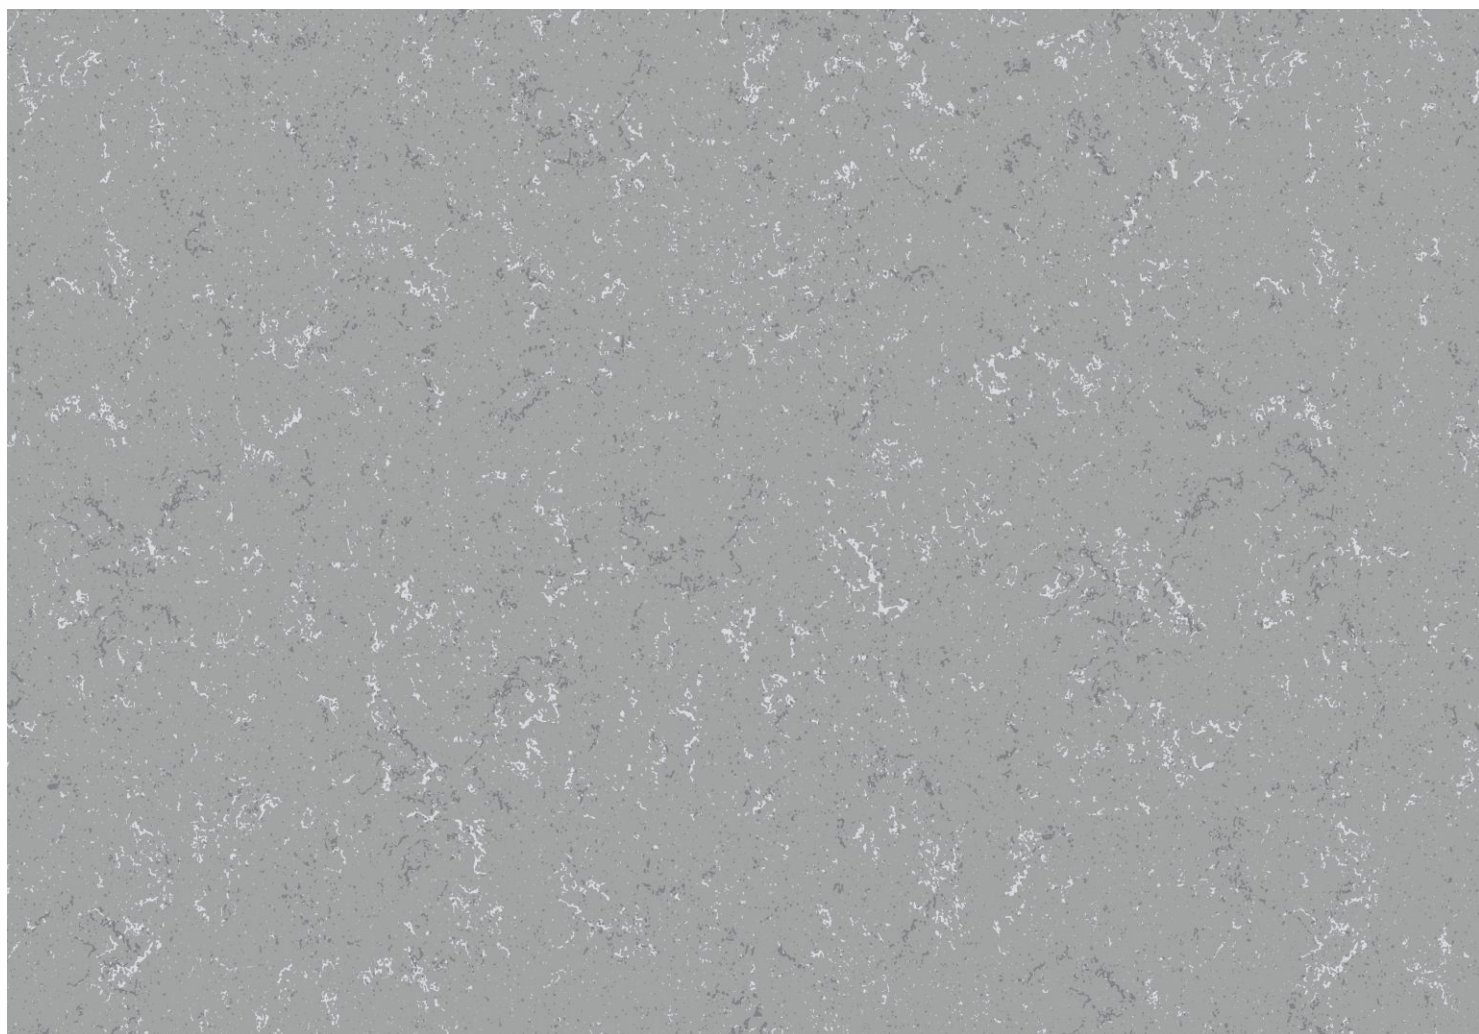

BALI STONE
SERIES



BALISTONE ASH

SIZE: 800x2400mm


THICKNESS: 15mm

FINISH: MATT

SCAN FOR
VIRTUAL
360°





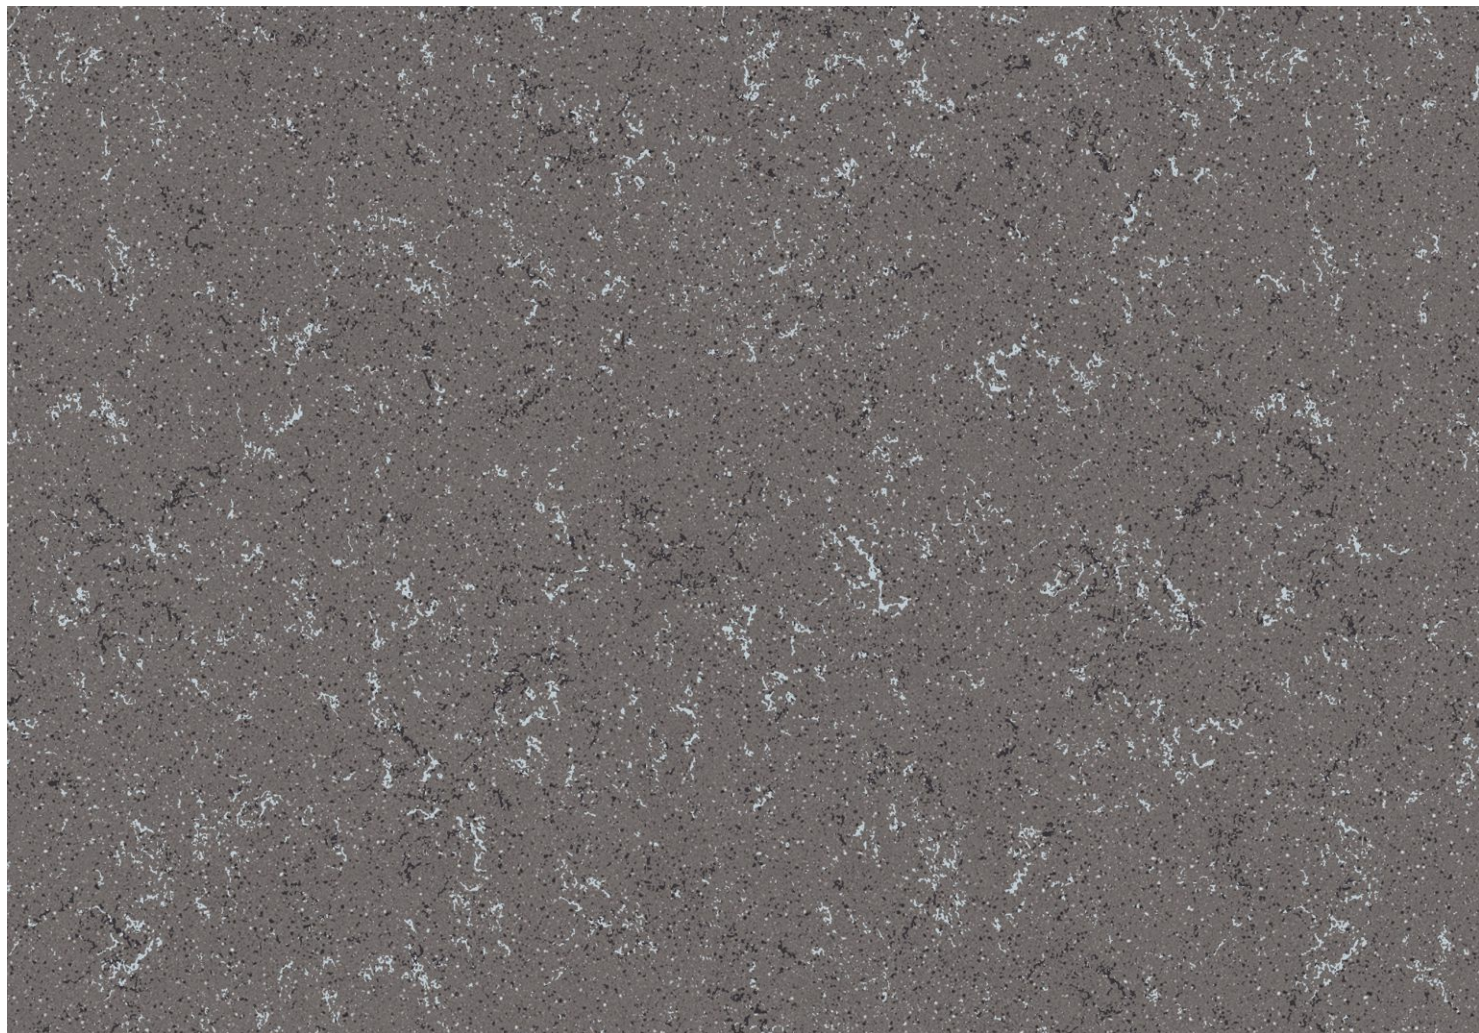

BALI STONE
SERIES




**BALISTONE
RAHINO**

SIZE: **800x2400mm**
THICKNESS: **15mm**
FINISH: **MATT**

SCAN FOR
VIRTUAL
360°





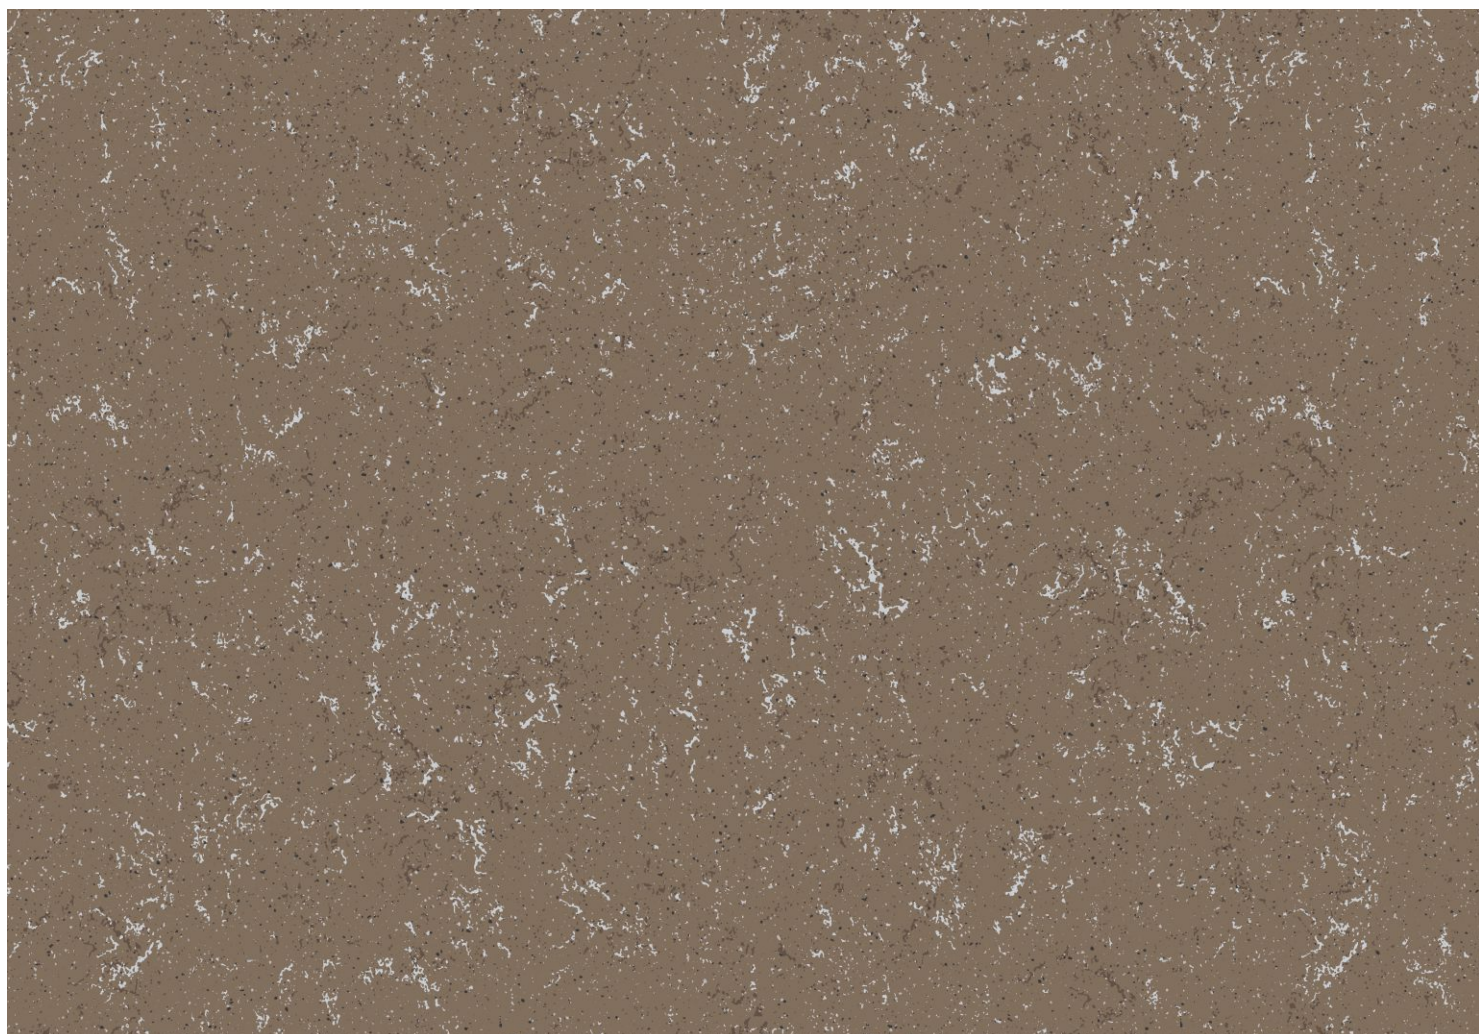

BALI STONE
SERIES



BALISTONE FOG

SIZE: 800x2400mm

THICKNESS: 15mm

FINISH: MATT

SCAN FOR
VIRTUAL
360°








BALI STONE
SERIES



**BALISTONE
MOSS**

SIZE: **800x2400mm**
THICKNESS: **15mm**
FINISH: **MATT**








BALI STONE
SERIES





**BALISTONE
LICI**


SIZE: **800x2400mm**
THICKNESS: **15mm**
FINISH: **MATT**





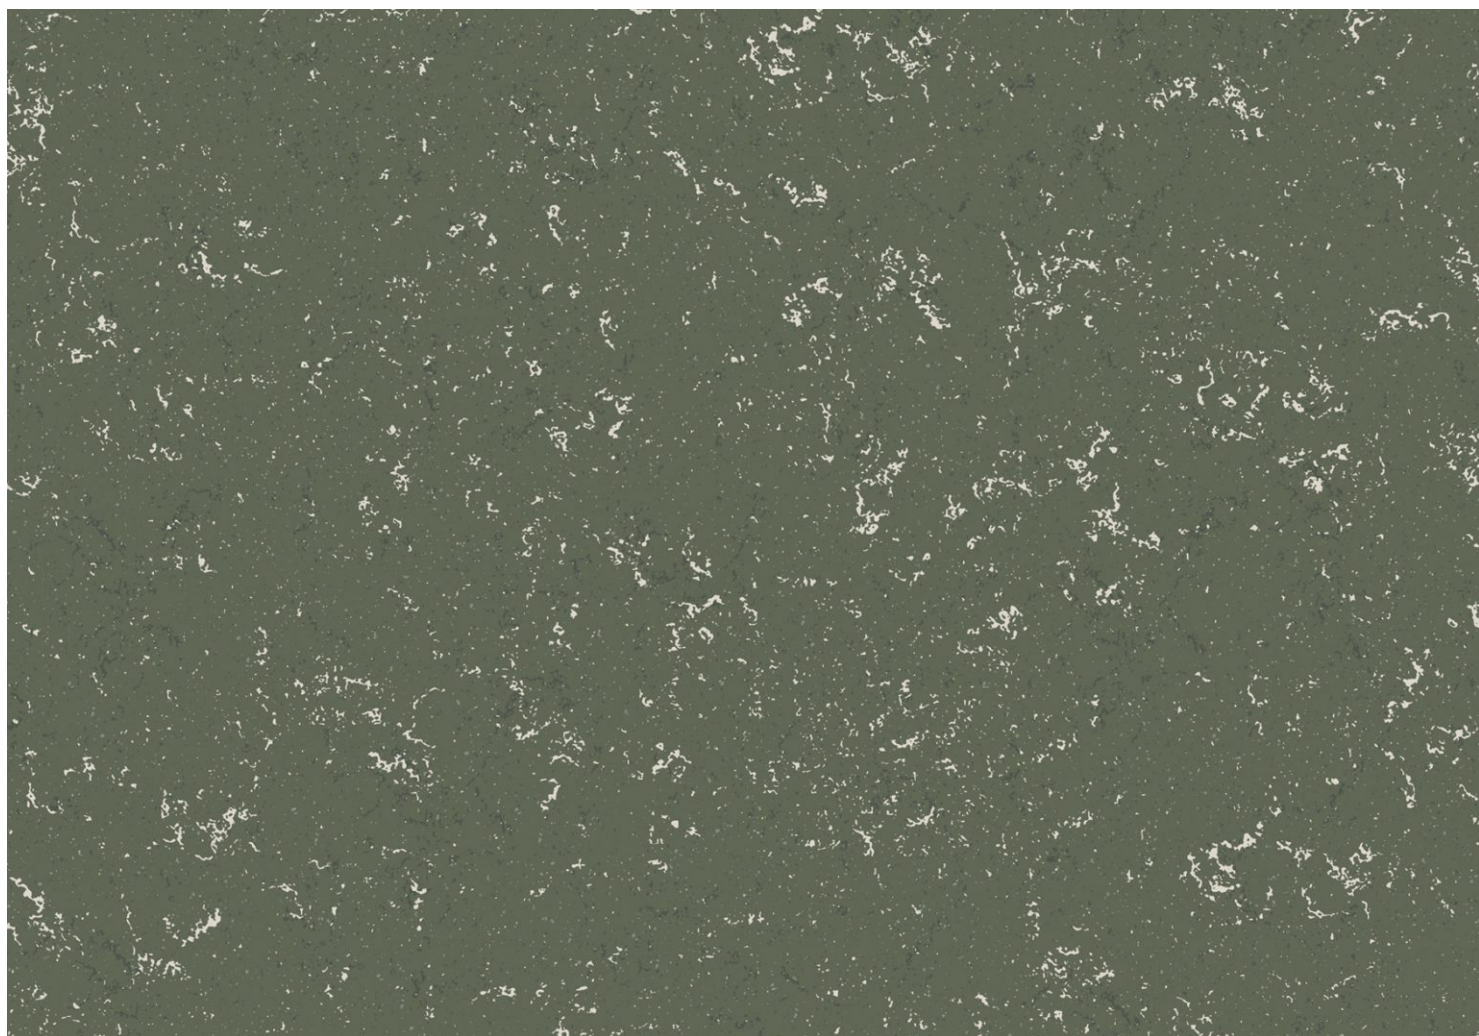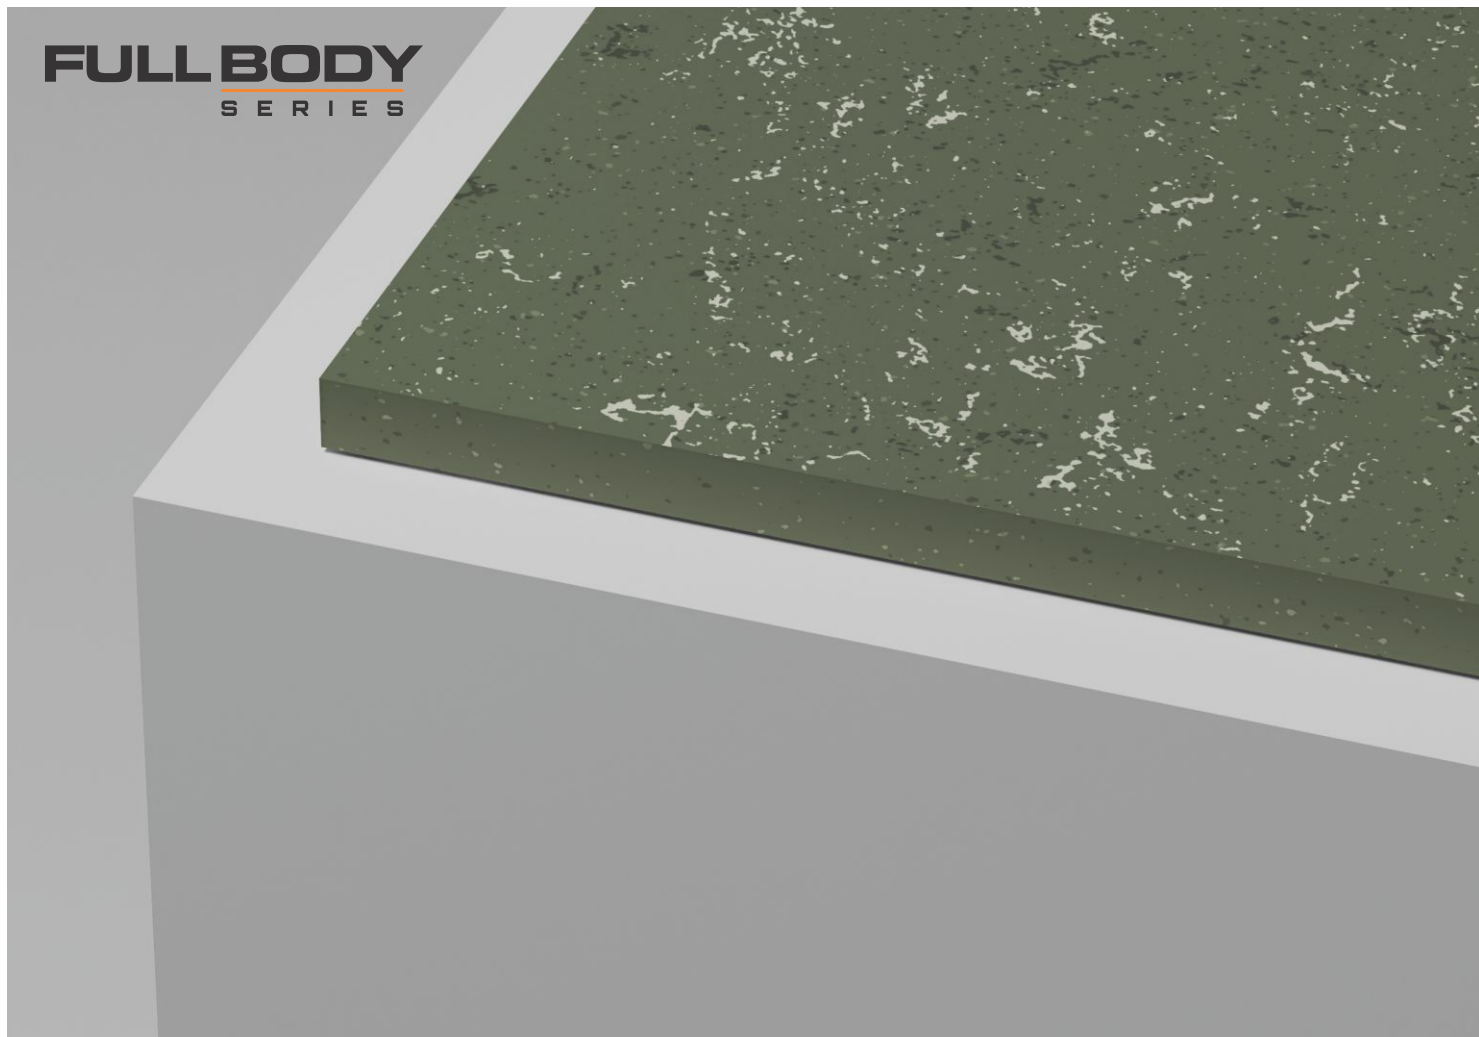


BALI STONE
SERIES


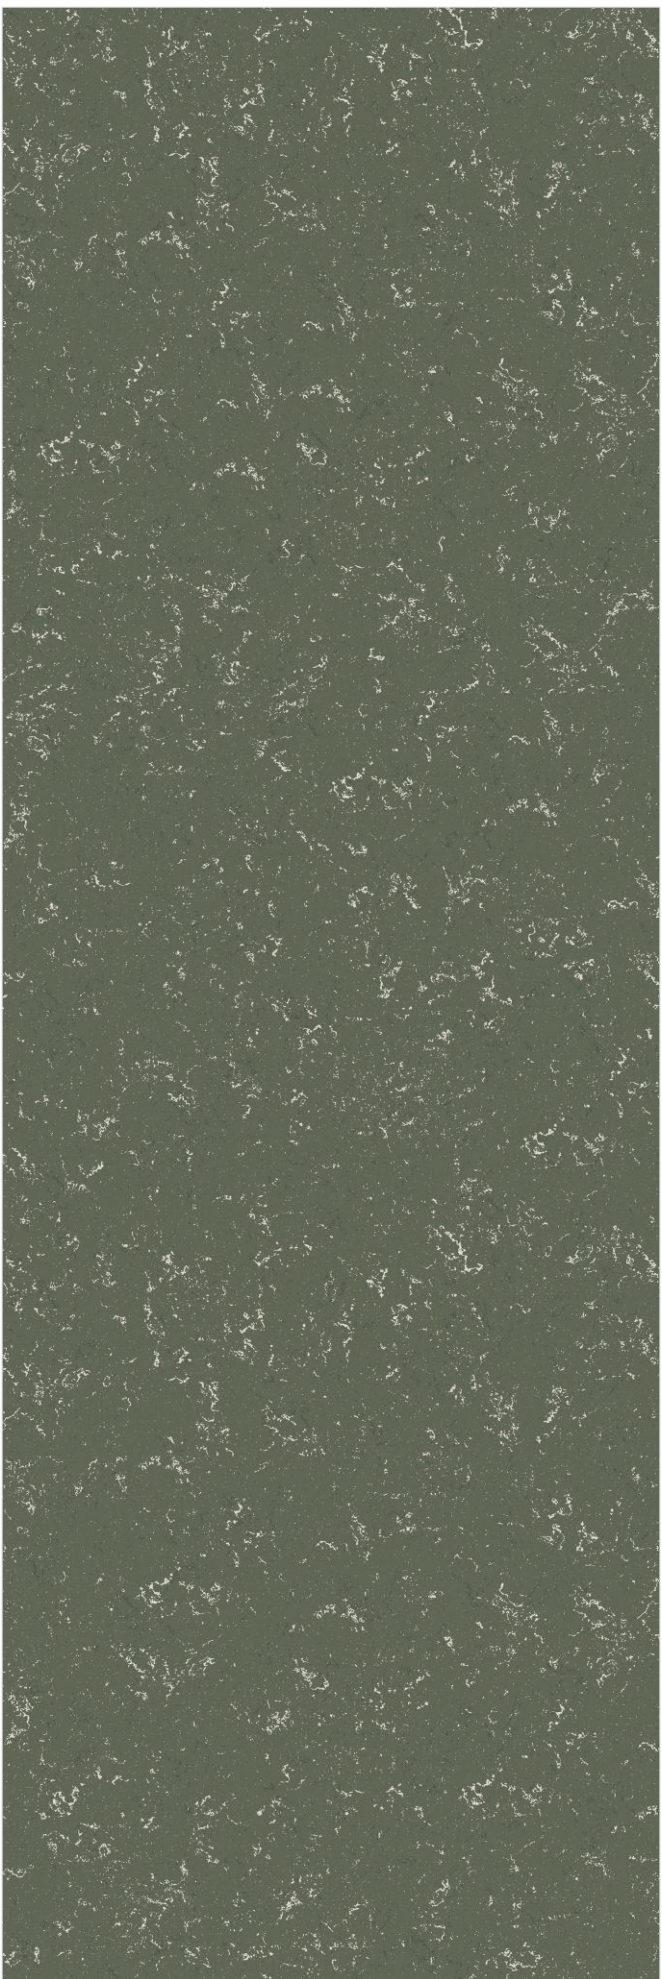


**BALISTONE
GREEN**

SIZE: 800x2400mm
THICKNESS: 15mm
FINISH: MATT





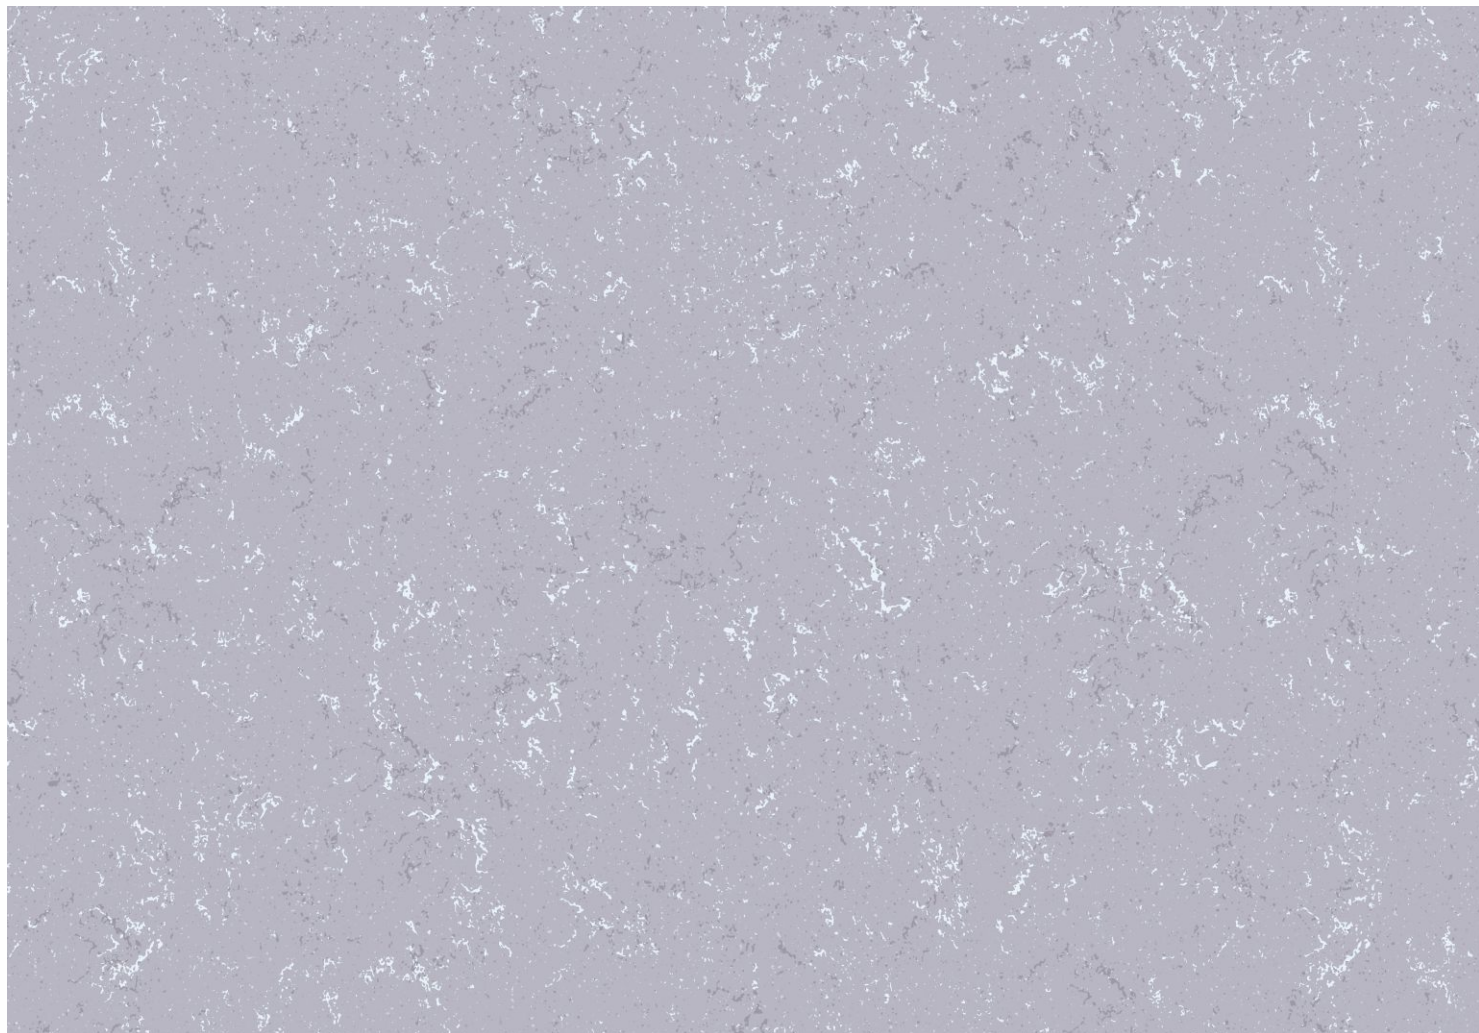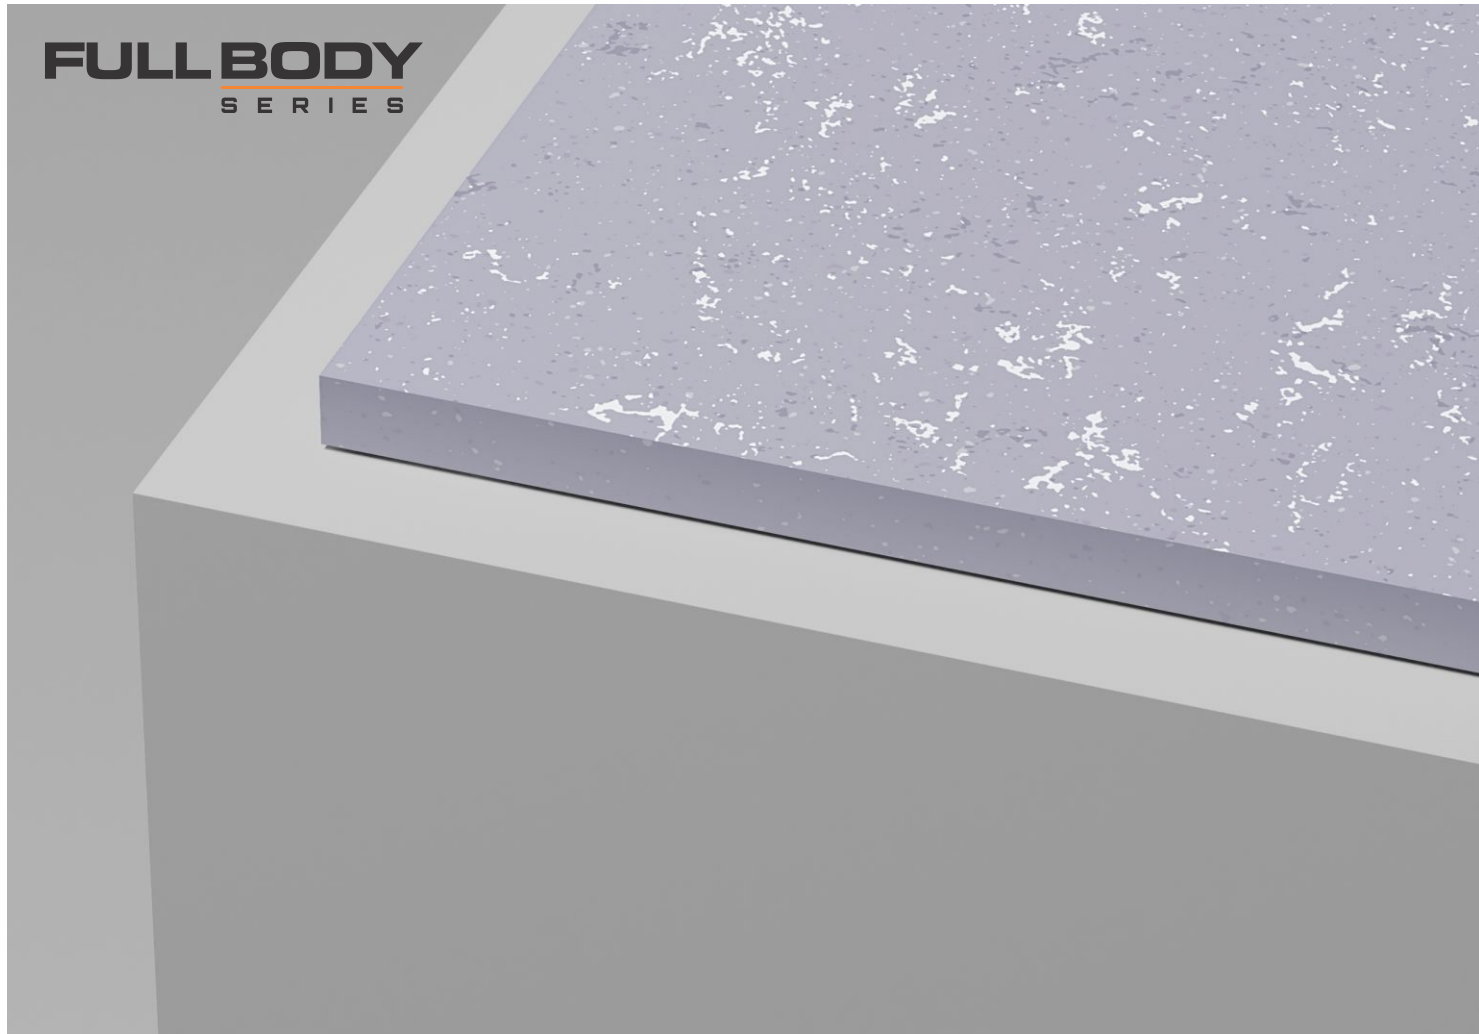

BALI STONE
SERIES



**BALISTONE
PEARL**


SIZE: **800x2400mm**
THICKNESS: **15mm**
FINISH: **MATT**



MANUALLY TRANSPORTING
SLAB

Only for 1/4" Slabs

MOVING A SLAB

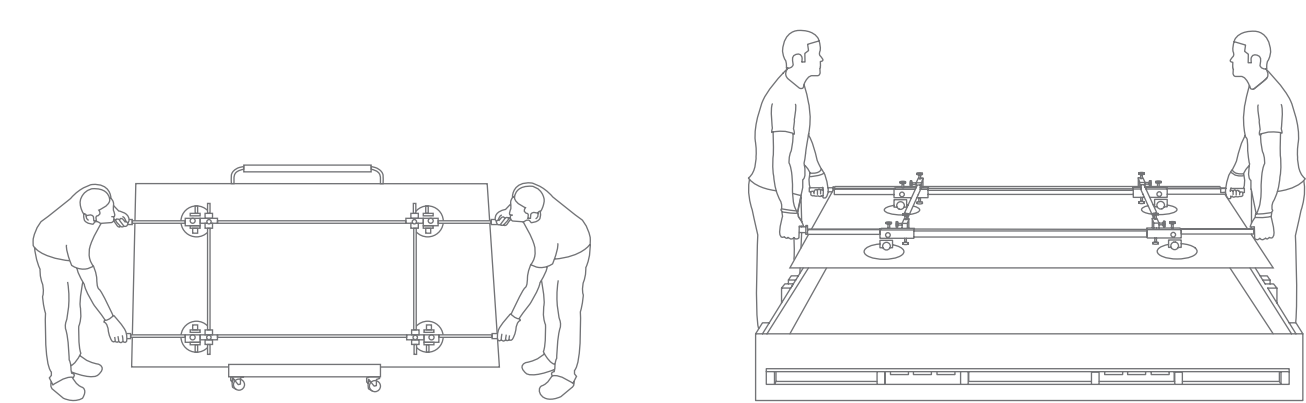


RAISING A IMMODERATE SLAB ONTO A BENCH



✗ INCORRECT

✓ CORRECT

HANDLING IMMODERATE SLAB FOR WALL

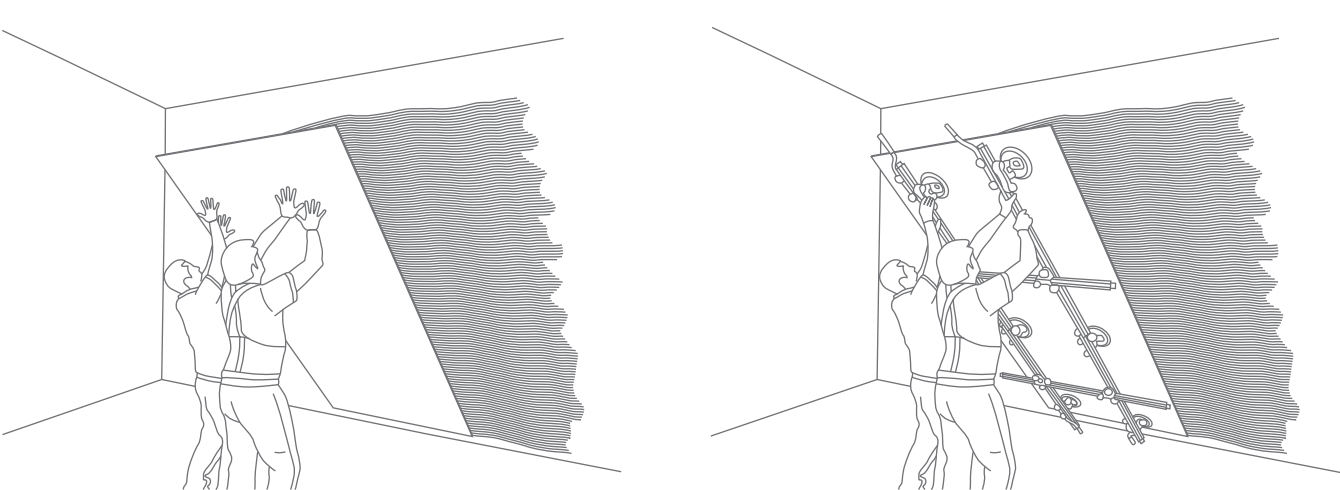


✗ INCORRECT

✓ CORRECT

WORKING WITH THE VARIOUS
VERSIONS OF SLAB

CUTTING WITH DIAMOND DISCS

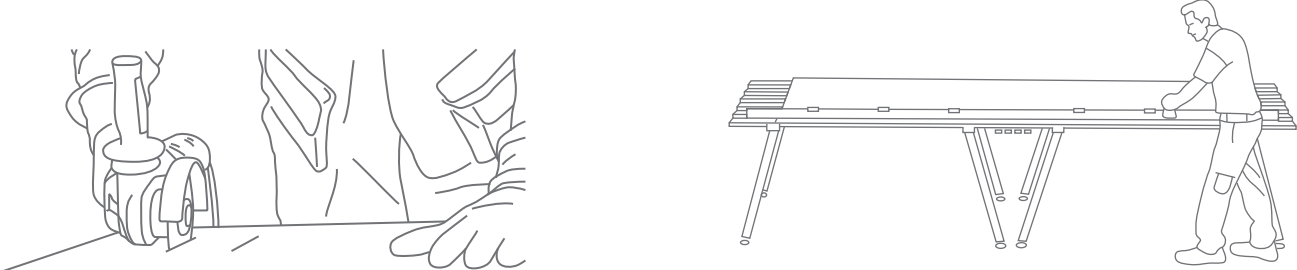


Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath.

DRILLING



You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, or electrical drills as an alternative.

INTERNAL CUT/L-SHAPED CUT

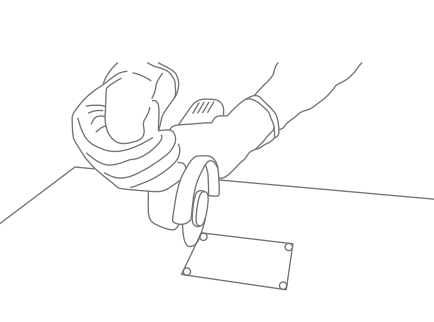


To get internal and L-shaped corners & to reduce the risk of breakage, cut 'o' at the vertex of the internal corners using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, and more follow the instructions provided below:

When using these tools:


- Cool the point being drilled with water
- Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
- If you are using tungsten bits, start drilling at a low speed
- If you are using drills or screwdrivers, do not select hammering mode

EDGE-FINISHING

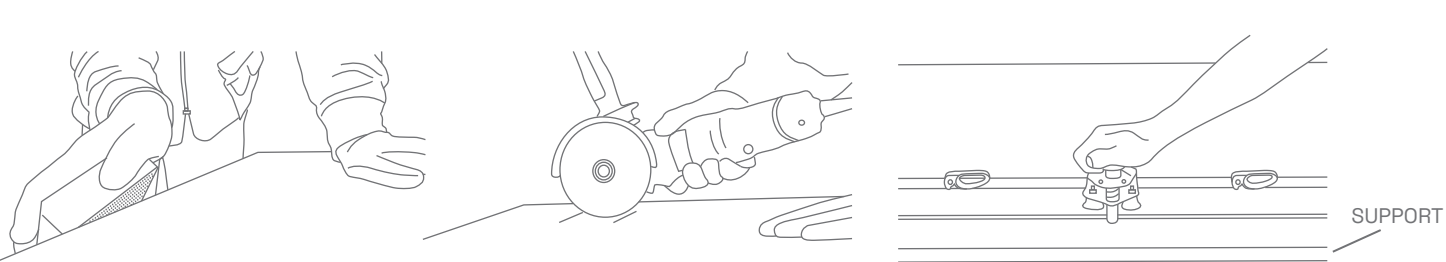


INSTRUCTIONS FOR
MANUAL INSTALLATION


SINGLE LAYER METHOD



DOUBLE-LAYER METHOD



COMPRESSING THE SLAB



IMPORTANT

All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles. We recommend a radius of more than 1/4" when the kitchen design allows as it makes the countertop firmer.



✓ CORRECT



✗ INCORRECT



✗ INCORRECT



✗ INCORRECT

CLEANING & MAINTENANCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Baking Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Agents, Hydrochloric Acid
Cement	Acid	Hydrochloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydrochloric Acid
Candle Wax	Solvent	Alcohol, Thinner
Iodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to be cleaned immediately, as soon as possible.

TECHNICAL
SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO -13006/2018 En14411 gr.bla	MOTTO VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length & Width	± 0.5%	± 0.2%	ISO 10545-2
Deviation in Thickness	± 5%	± 5%	ISO 10545-2
Straightness of Sides	± 0.5%	± 0.2%	ISO 10545-2
Rectangularity	± 0.5%	± 0.2%	ISO 10545-2
Surface Flatness	± 0.5%	± 0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	ΔE<0.30	ISO 10545-16
Glossiness	As per Mfg.	As Per Mfg.	Gloss Meter
Regulatory Properties			
Water Absorption	≤ 0.5 %	≤ 0.3 %	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of Rupture	Min.35N/mm ²	Min.40N/mm ²	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 5000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
Surface Mechanical Properties			
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Mohs Hardness	As per Mfg.	Min. class 4	BS EN 15771
Massive Mechanical Properties			
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.0x10 ⁻⁶	ISO 10545-8
Chemical Properties			
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
Safety Properties			
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING
DETAILS

Dimension (mm)	No. of Pcs/Box	Square Feet	Weight (Approx)
800x2400mm	1 Pcs.	20.67 Sq. ft	68 kg.



MOTTO GROUP

8-A, National Highway, Sartanpar Road, At. Sartanpar,
Ta. Wankaner, Morbi - 363 621, Gujarat, INDIA

Mail. info@mottogroup.in, **Web.** www.mottogroup.in

Toll-free. 1800 123 2124

Call. +91 95123 80072

Scan for Catalogue

